

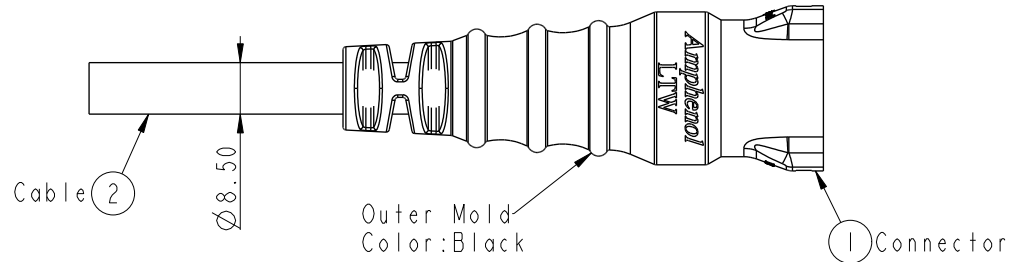
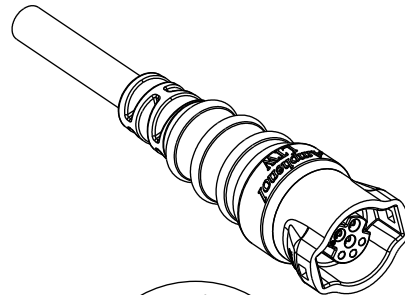
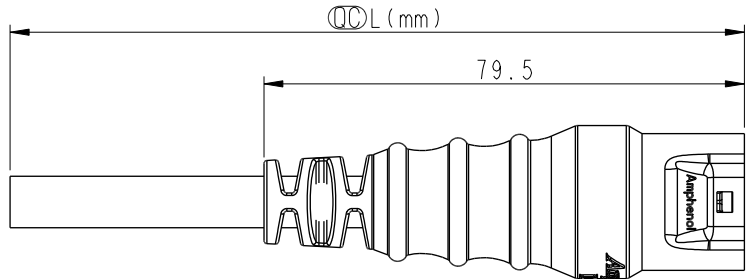


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200960	2020/06/23	Ruru	$\triangle B$ X4



Conn.



Pin Assignments Front View

6	Drain (20AWG)	地線
5	White (20AWG)	白
4	Green (20AWG)	綠
3	Blue (16AWG)	藍
2	Red (16AWG)	紅
1	Black (16AWG)	黑
Conn.	Wire Color	
Pin Out		

Twist

$\triangle B$ CBD-XXAFFM-RL8FXX

XX: No. Of Pin(Pin數)


XX:01~99Meter
 01:01Meter
 02:02Meter
 ...
 99:99Meter

Cable Length(L):01~99Meters

$\triangle B$ Note:

- * \circledast Important Dimension To Check
- * Waterproof Rate: IP68
- * Housing: Thermoplastic, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Gasket: Rubber, Gray
- * Cable: UL21996 3C*16AWG+(20#*1P+D+AL)+F+AL/MY PVC Jacket, OD=8.5, Black
- * Cable Length Tolerance: >0.3M~1.5M: +50/-0mm
 >1.5M~3M: +100/-0mm
 >3M~5M: +150/-0mm
 >5M~10M: ± 100 mm
 >10M~20M: ± 200 mm
 >20M~30M: ± 300 mm
 >30M~100M: ± 500 mm
- * Prohibiting the use of place in oils

UNIT:mm
 TOLERANCE
 ± 0.5



TITLE RBL, C-10A+5A, 06P, CABLE W/SR F, F, MOLDING, RBL			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. .0	\circledast : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DWG NO
	CBD-XXAFFM-RL8FXX $\triangle B$
CUSTOMER	ALTW

DRAWN BY Peng	CHECKED BY Mafei
APPROVED BY Jerry	

DATE 2019-04-28	DATE 2019-04-28	DATE 2019-04-28
--------------------	--------------------	--------------------