



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1440193	2014/05/10	Tom	Updated The Note.

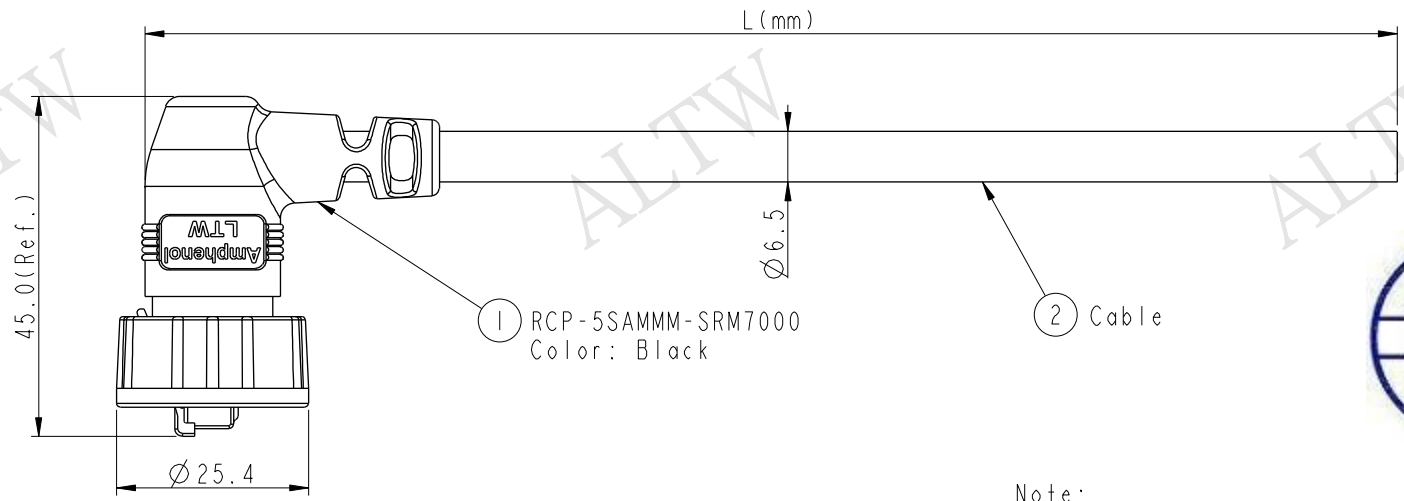

Note:

- * (C) Important Dimension
- * Waterproof Rate: IP67.
- * Plug: PC, UL94V-2, Gold Plated, Shielded
- * Screw Nut: Nylon+GF, Black.
- * Gasket: EPDM, Black.
- * Cable: (B) CAT5E FTP, OD Max.: $\varnothing 6.5$, Black.
- * Cable Length Tolerance:
 - 01M: ± 40 mm
 - 02~05M: ± 60 mm
 - 06~10M: ± 100 mm
 - 11~30M: ± 200 mm
 - 30~99M: ± 500 mm

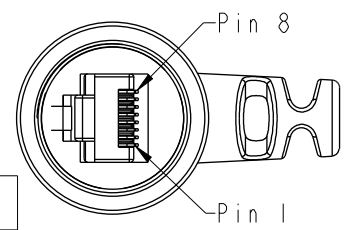

Pin Out		
Wire Color		Plug
Drain Wire	接地	Shield
Brown	棕	8
Brown/white	棕白	7
Green	綠	6
Blue/white	藍白	5
Blue	藍	4
Green/white	綠白	3
Orange	橙	2
Orange/white	橙白	1

Plug
RCP-5SAMMM-SRM7BXX


Twist 對絞

Twist 對絞

Twist 對絞

Twist 對絞

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters
(B)CAT5E FTP



UNIT: mm			TITLE RJ45, C SIZE, RIGHT ANGLE CABLE SCREW 5E M CONN M PIN		
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$	SCALE 1:1	SIZE A4	SHEET 1	OF 1	REV. B
	WC-REV. B.4	(C): Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	VICTOR	2014-05-10