
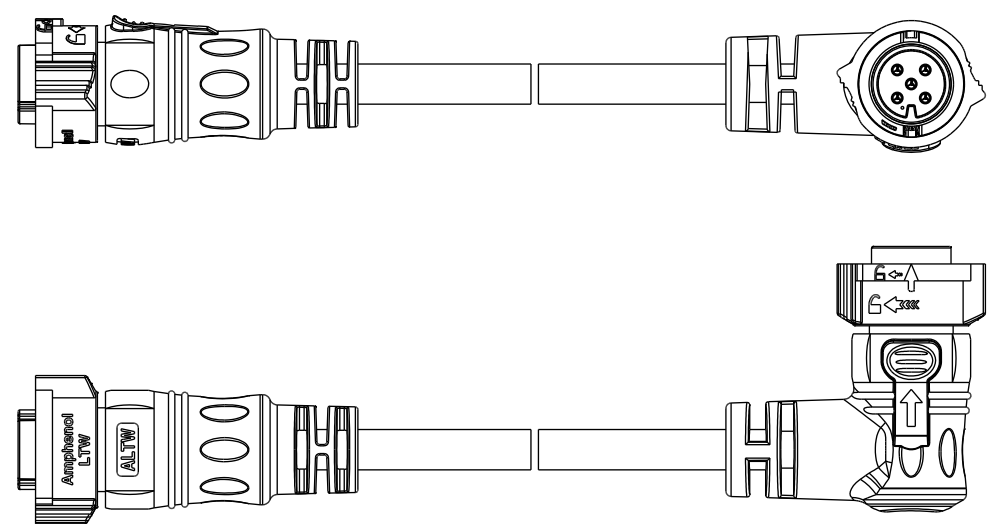


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/03	Ruru	Initial Released

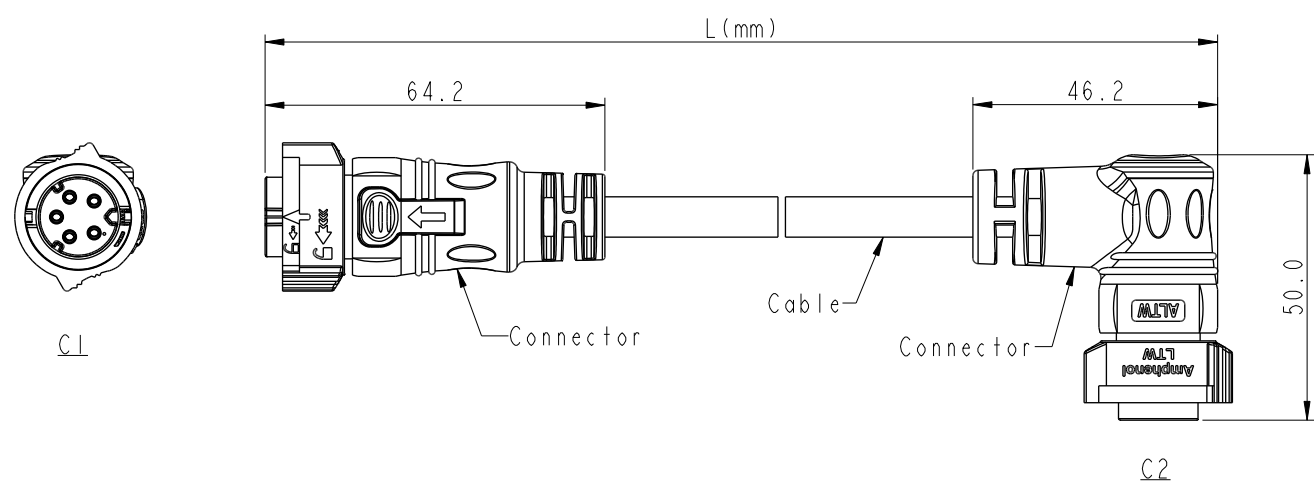

- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate: IP68, Mated.  
IP68: 1M depth of water in 24 hours.
  - \* Connector: Thermoplastic, Black
  - \* Pin: Copper Alloy, Gold Plated.
  - \* Cable: UL21388, PVC Jacket, Black.
  - \* Cable Length Tolerance:
    - 0.5M: +60/-0mm
    - 01M: +60/-0mm
    - 02~03M: +120/-0mm
    - 04~05M: +160/-0mm
    - 06~10M: ±100mm
    - 11~20M: ±200mm
    - 21~30M: ±300mm
    - 31~99M: ±500mm

UNIT: mm TOLERANCE $\pm 0.5$ mm	TITLE ACC, XLOK, C-10A, DB-ENDED FF		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO.	DRAWN BY Ruru	DATE 2020-01-03
	SCALE 1:2	SIZE A4			SHEET 1 OF 2	DWG NO. AB-CBXXFL-CBBR-QDXXX	CHECKED BY Rita
	REV. A	WC-REV.	$\varnothing$ : Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-03	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5P	PVC	7.6	16	AB-CB05FL-CBBR-QDXXX
4P		6.8		AB-CB04FL-CBBR-QDXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

Pin Out	4	Orange	橙	5	Yellow	黃
	3	Red	紅	4	Orange	橙
	2	Brown	棕	3	Red	紅
	1	Black	黑	2	Brown	棕
				1	Black	黑
	Pin #	Wire		Pin #	Wire	
C2						
	4P			5P		
C1						
	4P			5P		
Pin Assignments Front View						

AB- CB XX FL - CB BR - Q D XXX

04: 4Pin  
05: 5Pin

XXX: 0.5~99Meters  
A05: 0.5 Meter  
001: 01 Meter  
002: 02 Meters  
:  
099: 99 Meters

UNIT:mm

TOLERANCE  
± 0.5 mm

TITLE  
ACC, XLOK, C-10A, DB-ENDED  
FF

SCALE 1:2 SIZE A4 SHEET 2 OF 2

REV. A WC-REV. : Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO AB-CBXXFL-CBBR-QDXXX	Ruru	2020-01-03
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2020-01-03
	APPROVED BY	DATE
	Max	2020-01-03