
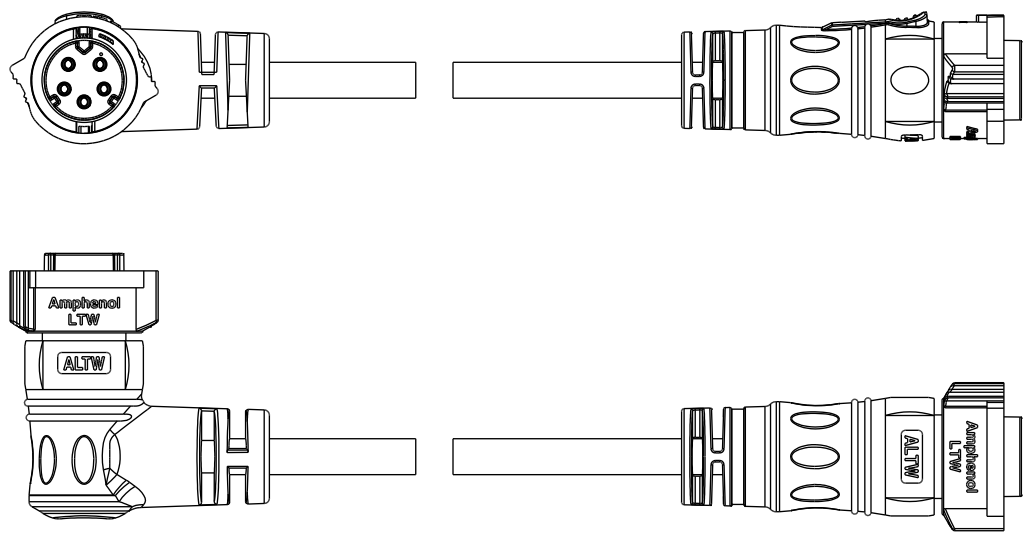


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/12/30	Ruru	Initial Released

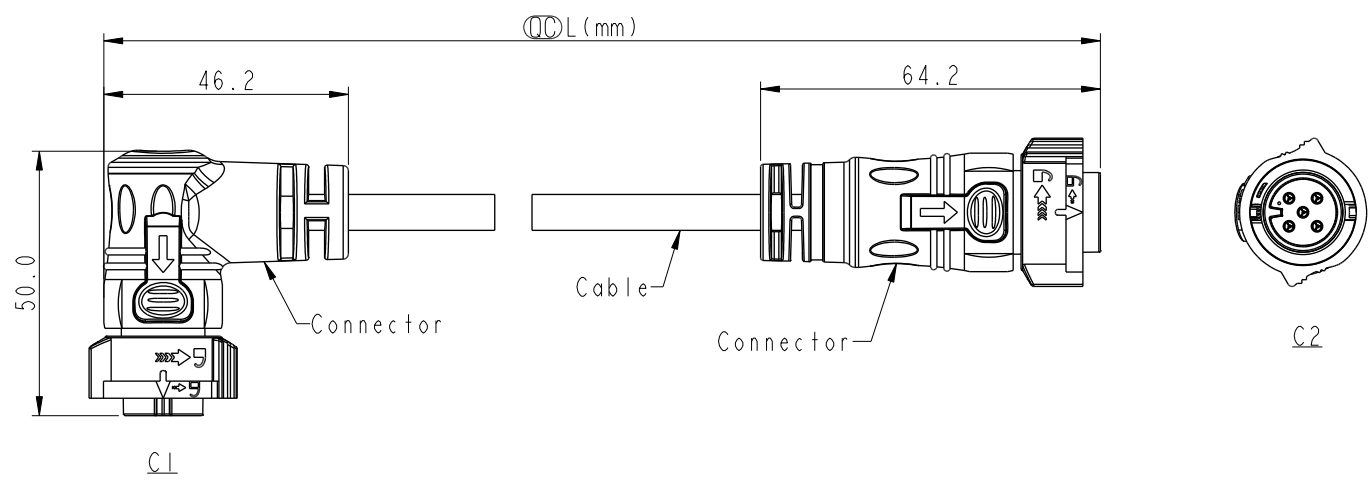

Note:
 * \varnothing Important Dimension.
 * Waterproof Rate: IP68, Mated.
 IP68: 1M depth of water in 24 hours.
 * Connector: Thermoplastic, Black
 * Pin: Copper Alloy, Gold Plated.
 * Cable: UL21388, PVC Jacket, Black.
 * Cable Length Tolerance: 0.5M: +60/-0mm
 01M: +60/-0mm
 02~03M: +120/-0mm
 04~05M: +160/-0mm
 06~10M: ±100mm
 11~20M: ±200mm
 21~30M: ±300mm
 31~99M: ±500mm

UNIT: mm		TITLE	ACC, XLOK, C-10A, DB-ENDED FF	
TOLERANCE	±0.5 mm	SCALE	1:2	SIZE A4
		REV.	A	WC-REV.
				\varnothing : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
	Ruru	2019-12-30
DWG NO.	CHECKED BY	DATE
AB-CBXXFR-CBBL-QDXXX	Rita	2019-12-30
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-12-30

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

5P		PVC	7.6	16	AB-CB05FR-CBBL-QDXXX
4P			6.8		AB-CB04FR-CBBL-QDXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.	

AB- CB XX F R - CB B L - Q D XXX

04: 4Pin
05: 5Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters

Pin Out	4 Orange 橙	5 Yellow 黃
	3 Red 紅	4 Orange 橙
	2 Brown 棕	3 Red 紅
	1 Black 黑	2 Brown 棕
		1 Black 黑
	Pin # Wire	Pin # Wire
C2		
	4P	5P
C1		
	4P	5P
Pin Assignments Front View		

UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE ACC, XLOK, C-10A, DB-ENDED FF		
SCALE 1:2	SIZE A4	SHEET 2 OF 2
REV. A	WC-REV.	: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2019-12-30
DWG NO AB-CBXXFR-CBBL-QDXXX	CHECKED BY Rita	DATE 2019-12-30
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-12-30