
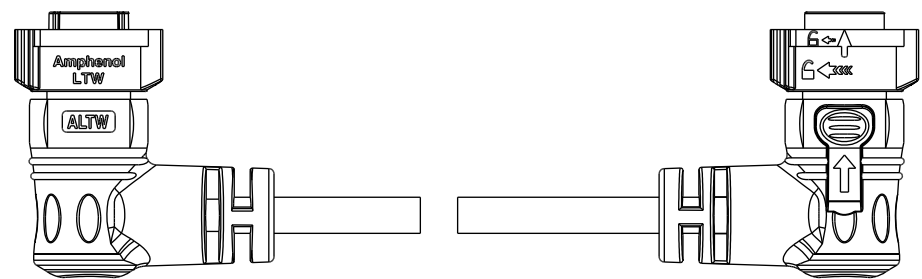
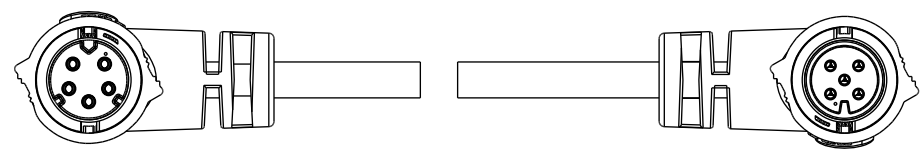


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/12/30	Ruru	Initial Released

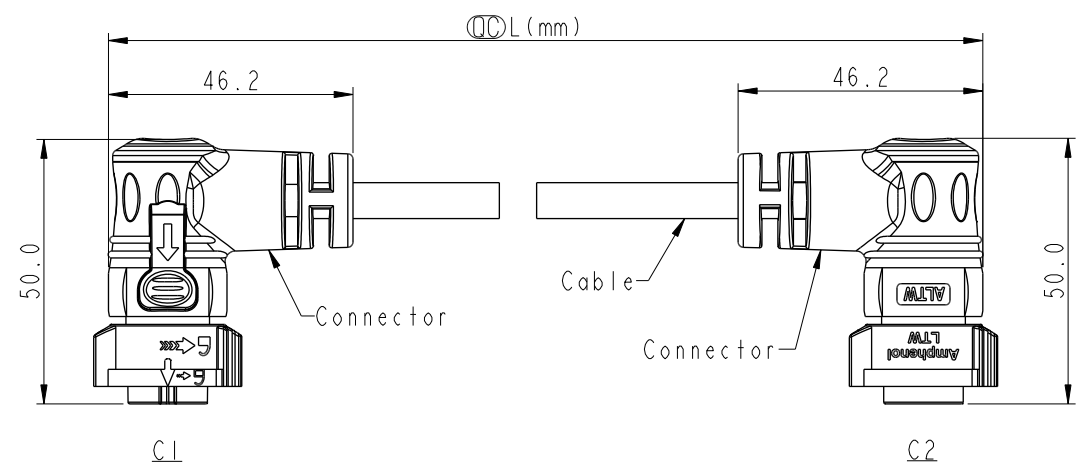

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP68, Mated.
IP68: 1M depth of water in 24 hours.
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated.
 - * Cable: UL21388, PVC Jacket, Black.
 - * Cable Length Tolerance:
 - 0.5M: +60/-0mm
 - 01M: +60/-0mm
 - 02~03M: +120/-0mm
 - 04~05M: +160/-0mm
 - 06~10M: ±100mm
 - 11~20M: ±200mm
 - 21~30M: ±300mm
 - 31~99M: ±500mm

UNIT: mm TOLERANCE ±0.5 mm		TITLE ACC, XLOK, C-10A, DB-ENDED FF		<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>	ITEM NO.	DRAWN BY Ruru	DATE 2019-12-30	
		SCALE 1:2	SIZE A4		SHEET 1 OF 2	DWG NO. AB-CBXXFR-CBBR-QDXXX	CHECKED BY Rita	DATE 2019-12-30
		REV. A	WC-REV.		\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2019-12-30

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5P		PVC	7.6	16	AB-CB05FR-CBBR-QDXXX
4P			6.8		AB-CB04FR-CBBR-QDXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.	

Pin Out	4	Orange	橙	5	Yellow	黃
	3	Red	紅	4	Orange	橙
	2	Brown	棕	3	Red	紅
	1	Black	黑	2	Brown	棕
				1	Black	黑
	Pin #	Wire		Pin #	Wire	
C2			4P			5P
			4P			5P
Pin Assignments Front View						

AB - CB XX FR - CB BR - Q D XXX

04: 4Pin
05: 5Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters

UNIT:mm		TITLE	ACC, XLOK, C-10A, DB-ENDED FF	
TOLERANCE	± 0.5 mm	SCALE	1:2	SIZE A4
		REV.	A	WC-REV.
			SHEET 2 OF 2	
			QC: Inspection item	

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-12-30
DWG NO	CHECKED BY	DATE
AB-CBXXFR-CBBR-QDXXX	Rita	2019-12-30
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-12-30