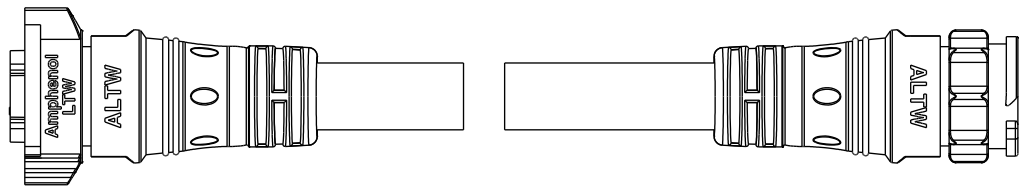
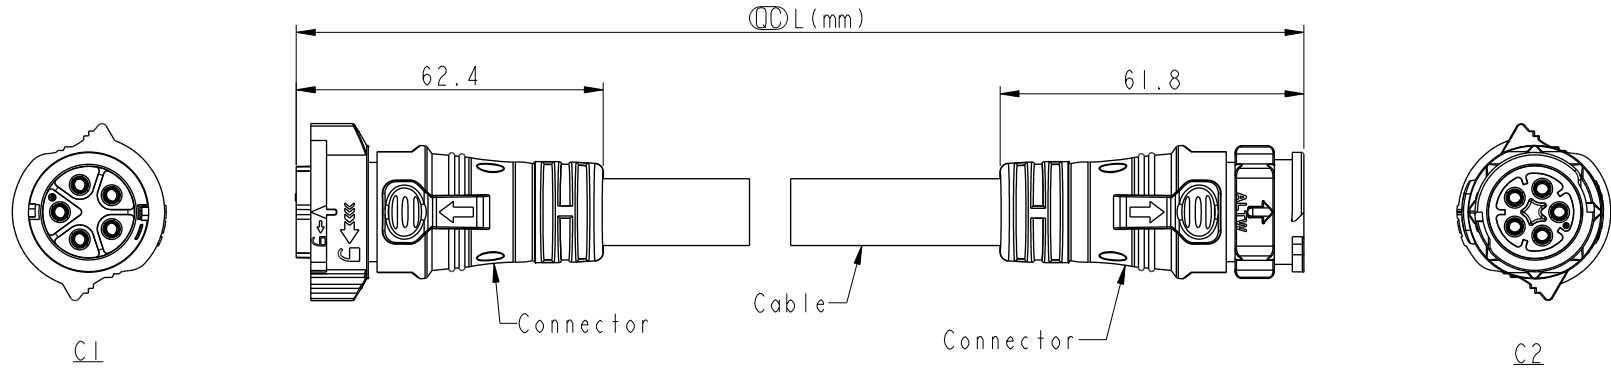


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/13	Ruru	Initial Released



- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate: IP68, Mated.  
IP68: 1M depth of water in 24 hours.
  - \* Connector: Thermoplastic, Black.
  - \* Pin: Copper Alloy, Gold Plated.
  - \* Cable: SJTW, PVC Jacket, Black.
  - \* Cable Length Tolerance: 0.5M: +60/-0mm  
01M: +60/-0mm  
02~03M: +120/-0mm  
04~05M: +160/-0mm  
06~10M: ±100mm  
11~20M: ±200mm  
21~30M: ±300mm  
31~99M: ±500mm

UNIT: mm	
TOLERANCE	±0.5 mm







TITLE ACC, XLOK, D-20A, DB-ENDED FM		
SCALE 1:2	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV.	$\varnothing$ : Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

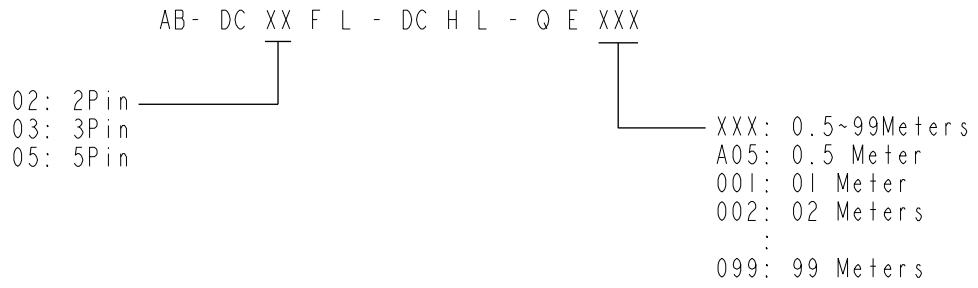
ITEM NO.	DRAWN BY Ruru	DATE 2020-01-13
DWG NO. AB-DCXXFL-DCHL-QEXXX	CHECKED BY Rita	DATE 2020-01-13
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-13


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

5P		PVC	13.6	12	AB-DC05FL-DCHL-QEXXX
3P			11.7		AB-DC03FL-DCHL-QEXXX
2P			10.7		AB-DC02FL-DCHL-QEXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.	

Pin Out	Pin #	Wire	Pin #	Wire	Pin #	Wire
2 White 1 Black	2 1	White Black	3 Green 2 White 1 Black	綠 白 黑	5 Brown 4 Red 3 Green 2 White 1 Black	棕 紅 綠 白 黑
C2						
C1						

Pin Assignments Front View



UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE ACC, XLOK, D-20A, DB-ENDED FM		
SCALE 1:2	SIZE A4	SHEET 2 OF 2
REV. A	WC-REV.	QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-13
DWG NO. AB-DCXXFL-DCHL-QEXXX	CHECKED BY Rita	DATE 2020-01-13
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-13