
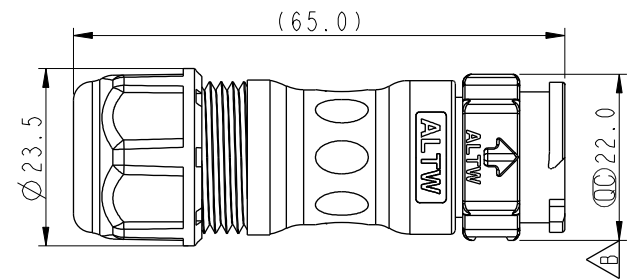


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2016/11/23	Victor Hung	Change Rev.01 To Rev.A
B	CI92027	2019/11/21	Vicky	$\triangle B$ X4

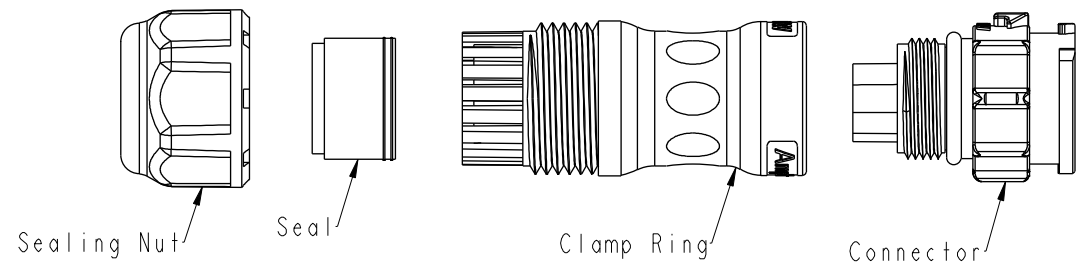

CD-XXBMFA-QL8XP0

07- 7Pin
 08- 8Pin
 09- 9Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
 M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
 L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
 A: With Seal 1 & Seal 2 & Seal 3.

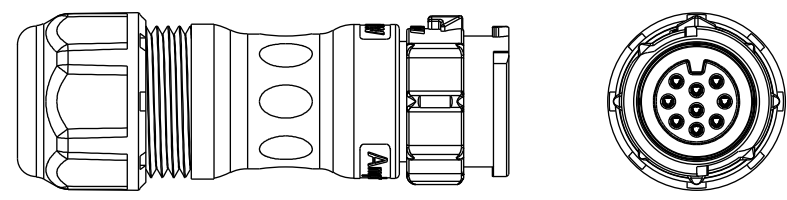

$\triangle B$ Note:

- * \varnothing Important Dimension
- * Waterproof Rate: IP68, Mated
IP68: 1M Depth Of Water In 24hours
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

Pin Assignments Front View	7 Pin	8 Pin	9 Pin

UNIT:mm		TITLE XLOK, C-5A, CABLE W/O SR M, F, FI CRIMP, XLOK $\triangle B$	
TOLERANCE	$\pm 0.5mm$	SCALE 1:1	SIZE A4
		REV. B	WC-REV. A.5
		SHEET 1 OF 1	
		\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Victor Hung	DATE 2016-11-23
DWG NO CD-XXBMFA-QL8XP0 $\triangle B$	CHECKED BY Wes Fan	DATE 2016-11-23
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2016-11-23