
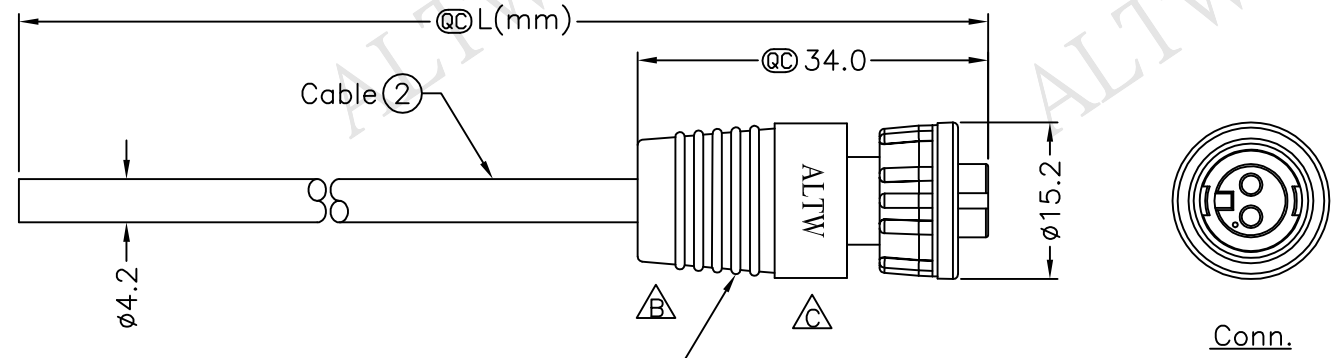


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1110261~264	2011/01/06	Vicky	Mini Size Molding外觀變更
C	LEN1640372~375	2016/04/13	Ruru	Change Logo


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



AD-02BFFM-SL7000 ①
Color:Black

AD-02BFFM-SL7AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Nylon+GF,Black.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Screw Nut:Nylon+GF,Black.
 - * O-Ring:EPDM,Black.
 - * Cable:UL2464 24AWG*2C+D+A,Black, PVC Jacket,UV Resistant,OD=4.2mm.
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

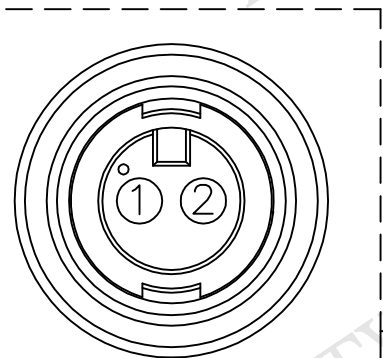

Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	
	Pin Out	

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Mini,Cable Screw 2P F Conn F Pin
SCALE	Free	SHEET 1 OF 1
REV.	C	SIZE A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2016/04/13
	Rita	2016/04/13
	Lisa	2016/04/13