


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8A0088~091	2008/09/10	Shin	Add Note
D	LEN-910009~012	2009/01/05	Ivan Lin	Update panel thickness
E	LEN15B0227~230	2015/11/03	Ruru	Change Logo


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

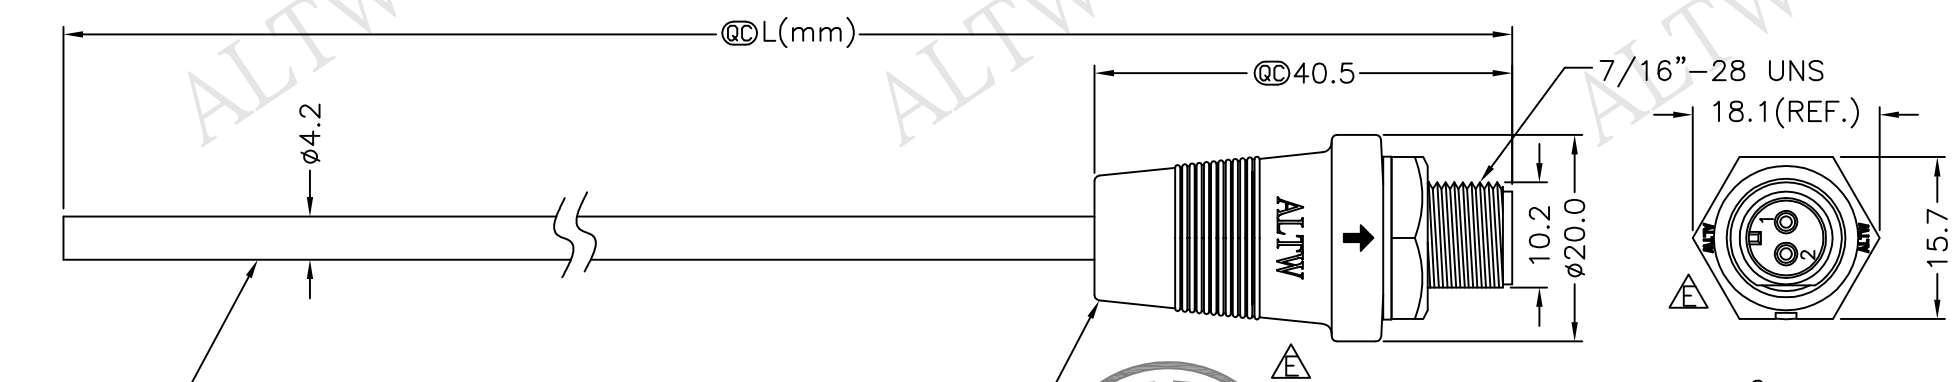


Cable ②

AD-02PMMM-SL7000 ①
Color: Black

AD-02PMMM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



- Note:
- * @@Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+A, PVC Jacket UV Resistant OD=4.2mm, Black
 - △△ * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - △△ * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - △ * Cable Length Tolerance: 01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm

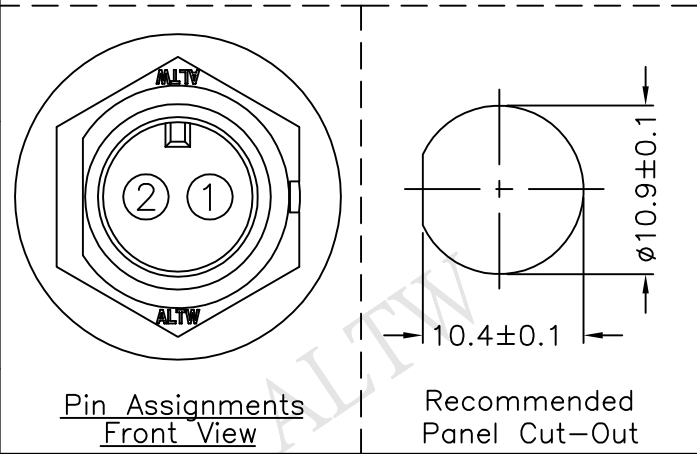

Conn.	Wire Color	Pin Out
2	Red 紅	
1	Black 黑	

UNIT:mm	TITLE Mini Cable Screw 2P M Conn M Pin	Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Ruru	DATE 2015/11/03
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO AD-02PMMM-SL7AXX	CHECKED BY Rita	DATE 2015/11/03
REV. E	SIZE A4	QC : Inspection Item		CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/11/03