



5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

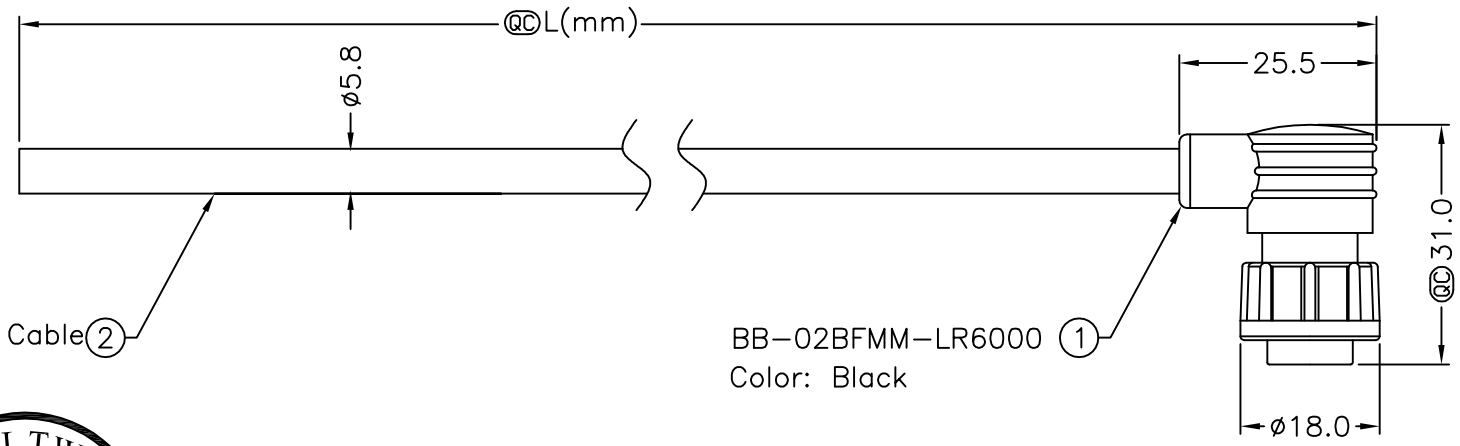

BB-02BFMM-LR6000 (1)
Color: Black


BB-02BFMM-LR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



ALTW
DCC. DEPT.
CONFIDENTIAL
2007.04.03
ISSUED

ALTW
CONFIDENTIAL
2007.03.30
R&D DEPT.

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*2C+Drain+Al/My
PVC Jacket UV Resistant OD=5.8mm
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.



Pin Assignments
Front View

2	Red
1	Green
Conn.	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Lock 2Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO BB-02BFMM-LR6AXX
CUSTOMER ALTW	

DRAWN BY Kenneth James Vergara	CHECKED BY Robert Dabu
APPROVED BY Win	

DATE 2007/03/30
DATE 2007/03/30
DATE 2007/03/30

1
F
E
D
C
B
A

2
3

4
5

6

7

8
FMWIG02-01-01A2