



| | | | | |
|------|---------------|------------|-------|----------------------------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN-070053~56 | 2010/07/12 | Vicky | Update gray wire 20AWG to 24AWG. |
| C | LEN1660047~50 | 2016/05/27 | Ruru | Change Logo |

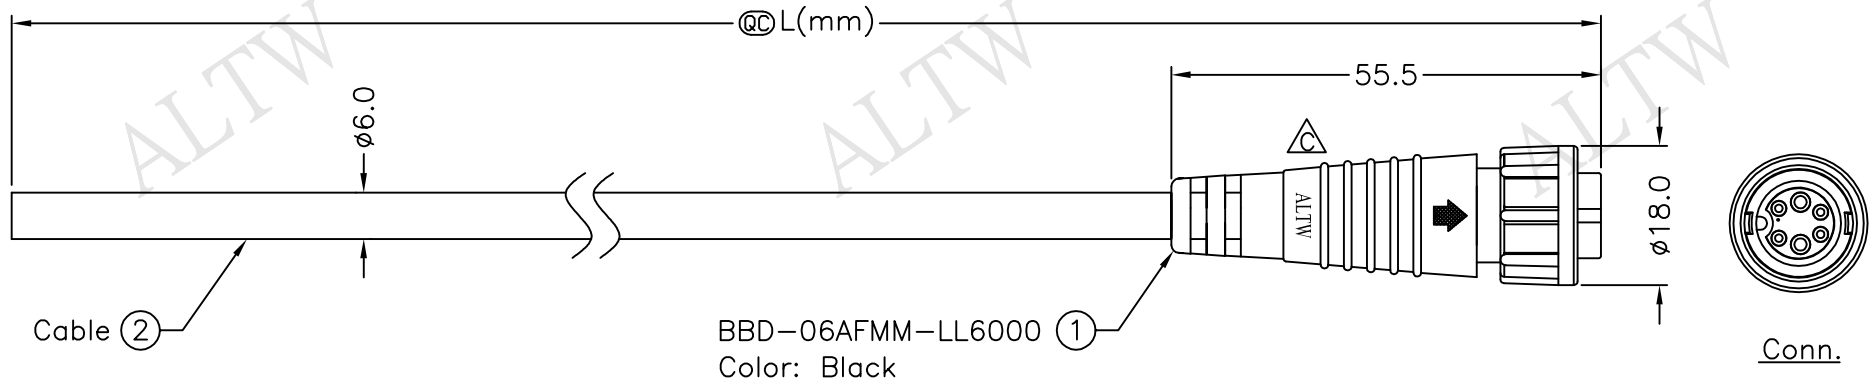

BBD-06AFMM-LL6AXX


XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters

Cable Length(L):01~99Meters



Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66.
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My, PVC Jacket, UV Resistant, OD=6.0mm, Black.
- * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

| | | | | |
|---------|------------|---------|---|---|
| 6 | Gray | (24AWG) | 灰 | △ |
| 5 | Blue | (20AWG) | 藍 | |
| 4 | Yellow | (24AWG) | 黃 | |
| 3 | Green | (24AWG) | 綠 | |
| 2 | Brown | (20AWG) | 棕 | |
| 1 | White | (24AWG) | 白 | |
| Conn. | Wire Color | | | |
| Pin Out | | | | |

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ±0.5 mm |

| | | | |
|------------------------------|------|----------|--------|
| TITLE | | Standard | |
| Cable Lock 6Pin F Conn M Pin | | | |
| SCALE | Free | SHEET | 1 OF 1 |
| REV. | C | SIZE | A4 |
| @C :Inspection Item | | | |

Amphenol LTW
 安費諾亮泰企業股份有限公司

| | | |
|-------------------|-------------|------------|
| ITEM NO | DRAWN BY | DATE |
| DWG NO | CHECKED BY | DATE |
| CUSTOMER | APPROVED BY | DATE |
| BBD-06AFMM-LL6AXX | Ruru | 2016/05/27 |
| ALTW | Rita | 2016/05/27 |
| | Lisa | 2016/05/27 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.