

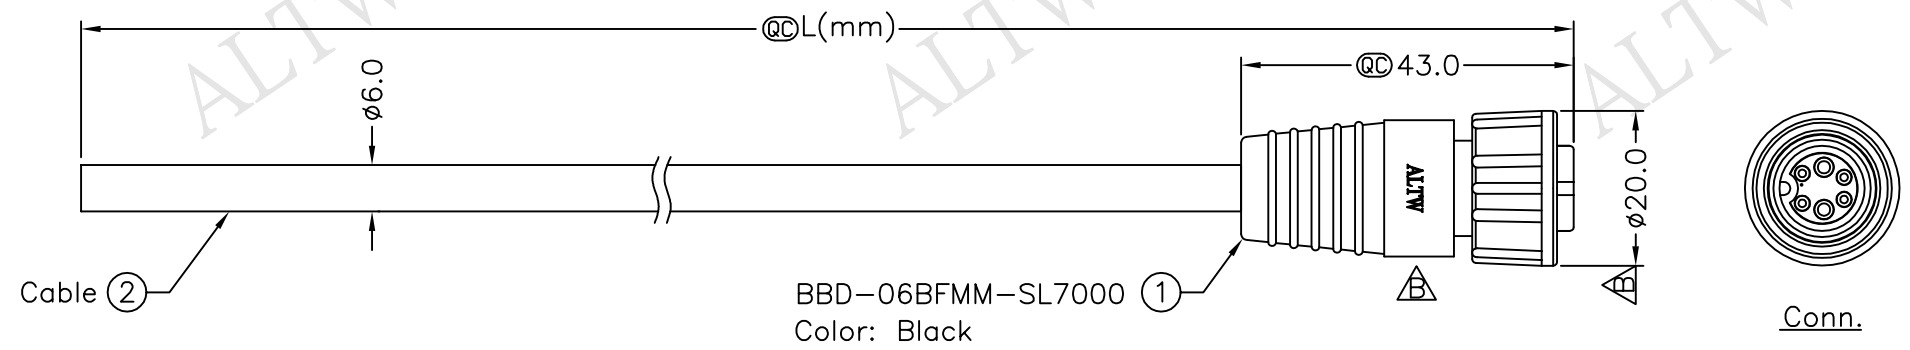


5	6	7	8
REV. B	ECN NO. LEN1610020~023	DATE 2015/12/28	SIGN Vicky
			DESCRIPTION Update Logo, Note & Dimension


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.



BBD-06BFMM-SL7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My, PVC Jacket, UV Resistant, OD=6.0mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

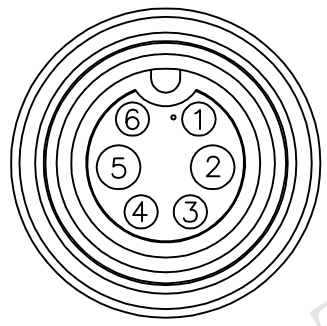

Pin Assignments
Front View

6	Gray (24AWG)	灰
5	Blue (20AWG)	藍
4	Yellow (24AWG)	黃
3	Green (24AWG)	綠
2	Brown (20AWG)	棕
1	White (24AWG)	白
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 6Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BBD-06BFMM-SL7AXX
CUSTOMER	ALTW

DRAWN BY	Vicky
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2015/12/28
DATE	2015/12/28
DATE	2015/12/28