


5	6	7	8
REV. B	ECN NO. LEN1660080~083	DATE 2016/05/27	SIGN Ruru
			DESCRIPTION Change Logo & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

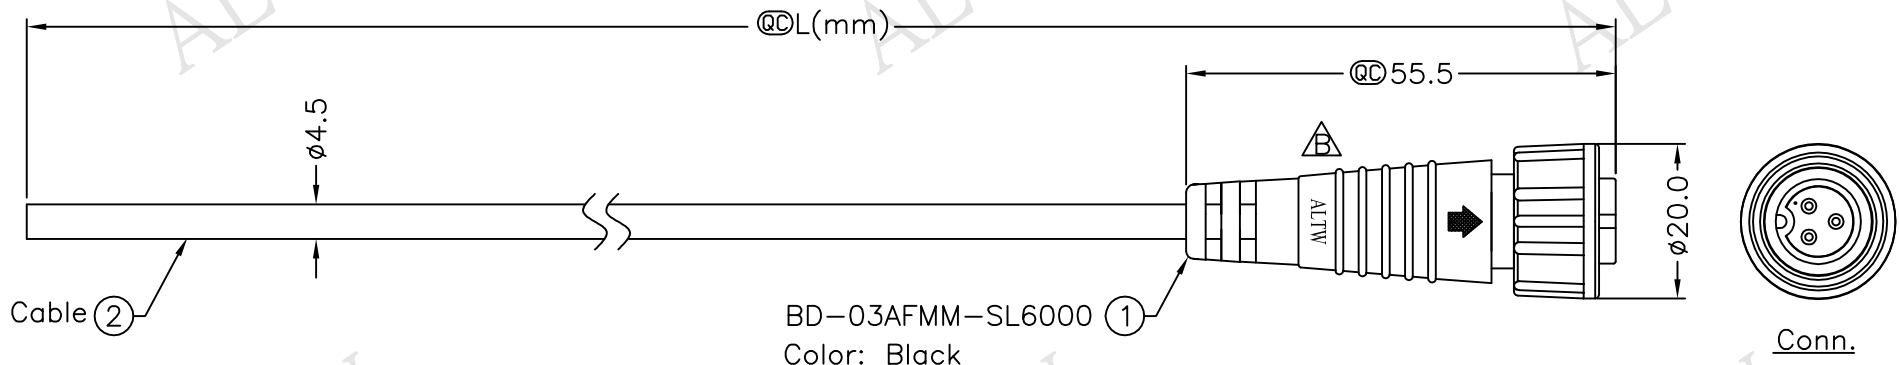

BD-03AFMM-SL6000
Color: Black


BD-03AFMM-SL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



Pin Assignments
Front View

3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*3C+Drain+Al/My, PVC Jacket UV Resistant, OD=4.5mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Screw 3Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO BD-03AFMM-SL6AXX
CUSTOMER	ALTW

DRAWN BY Ruru	DATE 2016/05/27
CHECKED BY Rita	DATE 2016/05/27
APPROVED BY Lisa	DATE 2016/05/27

A B C D E F

1 2 3 4 5 6 7 8