


5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

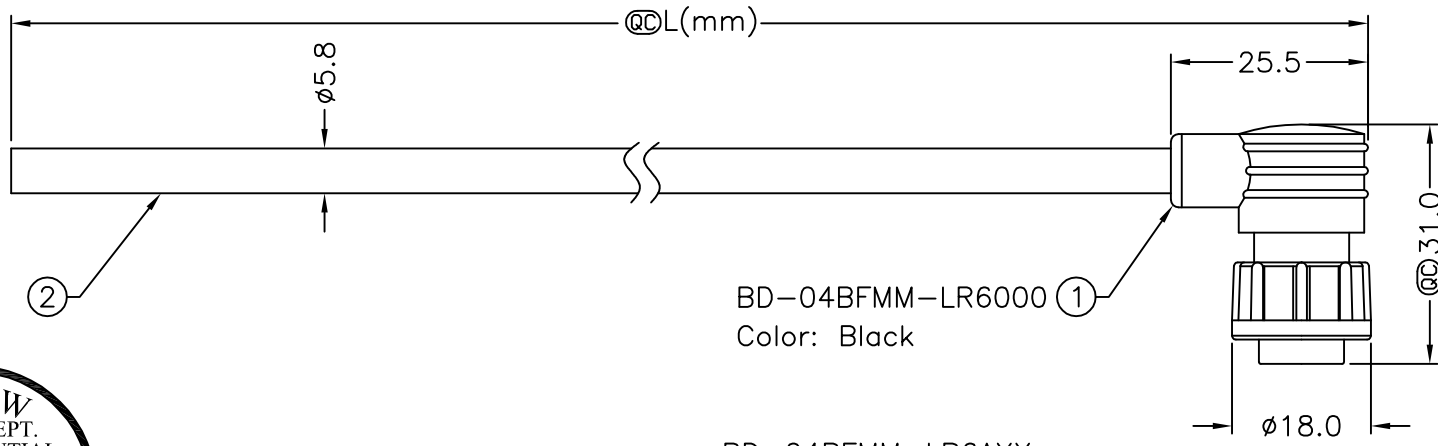


BD-04BFMM-LR6000 (1)
Color: Black




BD-04BFMM-LR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- :
- :
- 99:99Meters

Cable Length(L):01~99Meters



Conn.



Pin Assignments
Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
Pin Out	

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Cable: Black, UL2464 24AWG*4C+Drain+Al/My
PVC Jacket UV Resistant, OD=5.8mm
- * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Lock 4Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Raul Paulo Canja
DWG NO BD-04BFMM-LR6AXX	CHECKED BY Ricky Valerio
CUSTOMER ALTW	APPROVED BY Win

DATE 2007/01/25
DATE 2007/01/27
DATE 2007/01/27