


5	6	7	8
REV.	ECN NO.	DATE	SIGN


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

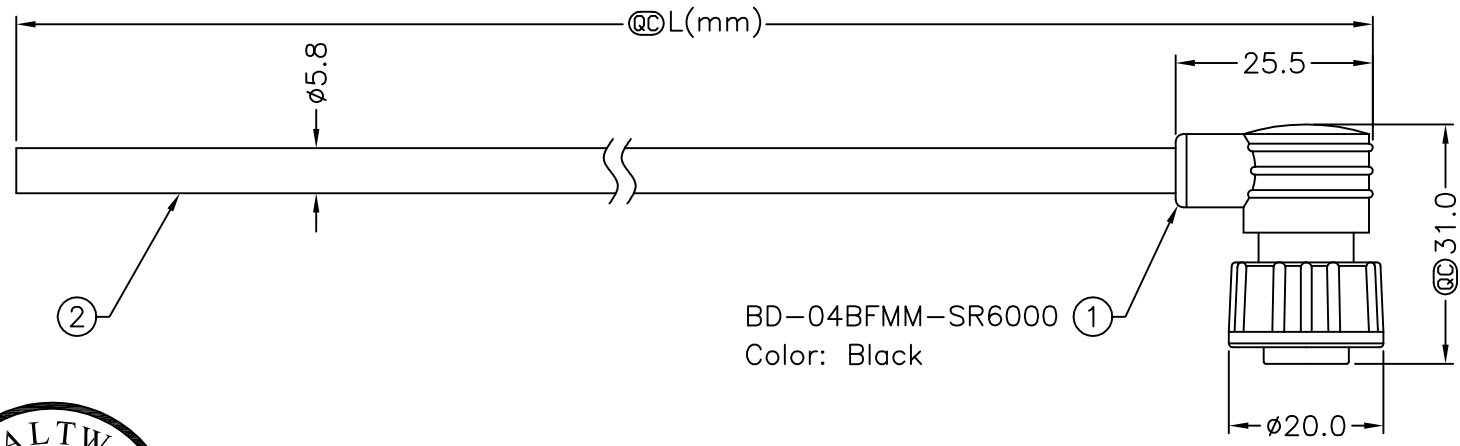

BD-04BFMM-SR6000 ①
Color: Black

BD-04BFMM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters






Conn.

Cable Length(L):01~99Meters

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy,Gold Plated
- * Cable: Black,UL2464 24AWG*4C+Drain+Al/My
PVC Jacket UV Resistant, OD=5.8mm
- * Cable Length Tolerance:1M~10M±5%mm, 11M~99M±500mm.



Pin Assignments
Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Screw 4Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO BD-04BFMM-SR6AXX
CUSTOMER ALTW	

DRAWN BY Raul Paulo Canja	CHECKED BY Robert Dabu
APPROVED BY Win	

DATE 2007/02/10	DATE 2007/02/12
DATE 2007/02/12	

A B C D E F

1 2 3 4 5 6 7 8