


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0447~450	2008/10/02	Ivan	Update notes
D	LEN1610308~311	2016/01/20	Ruru	Change Logo & Note
E	LEN1790410~413	2017/09/27	Ruru	Update View

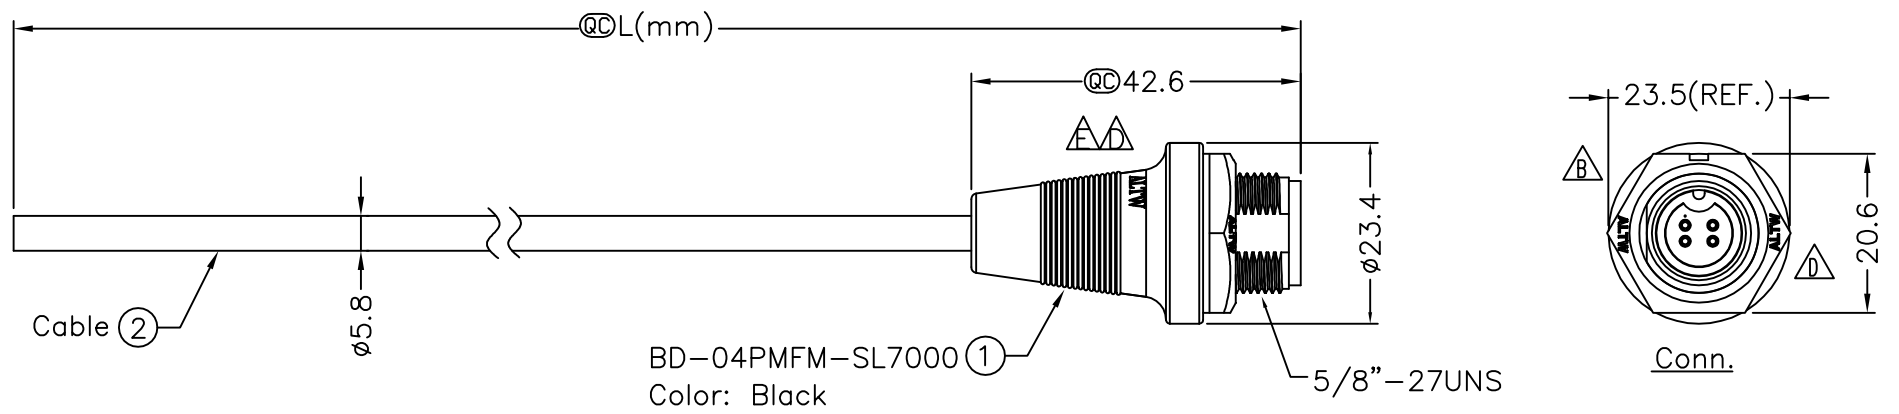

BD-04PMFM-SL7000 ①  
Color: Black




BD-04PMFM-SL7AXX

↑  
XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

- Note:  $\triangle B$
- \*  $\textcircled{C}$  Important Dimensions To Check.
  - \* Waterproof Rate: IP67
  - \* Housing: Black,Nylon+GF
  - \* Female Pin: Copper Alloy,Gold Plated
  - \* Gasket: Black,EPDM
  - \* Nut: Black,Nylon+GF
  - \* Cable: UL2464 24AWG\*4C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.8
  - $\triangle C$ \* Use With Waterproof Cap Or Dust Cap  
Panel Thickness Max: 2.5mm
  - $\triangle C$ \* Use Without Waterproof Cap Or Dust Cap  
Panel Thickness Max: 3.5mm
  - $\triangle D$ \* Cable Length Tolerance: 01M:  $\pm 40$ mm  
02M~05M:  $\pm 60$ mm  
06M~10M:  $\pm 100$ mm  
11M~30M:  $\pm 200$ mm  
31M~99M:  $\pm 500$ mm

4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn.	Wire Color	

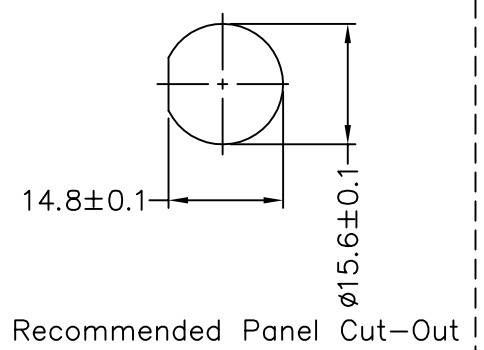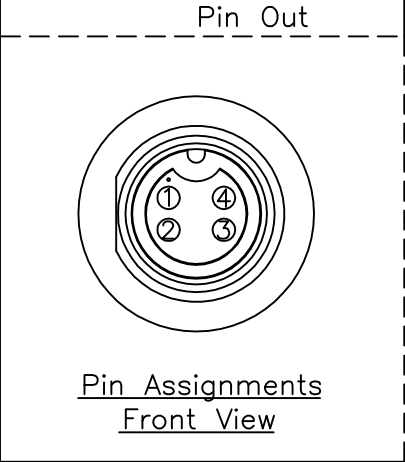

UNIT:mm		TITLE
TOLERANCE		Standard,Cable Screw 4Pin M Conn. F Pin
$\pm 0.5$ mm	SCALE Free	SHEET 1 OF 1
REV. E	SIZE A4	$\textcircled{C}$ :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
BD-04PMFM-SL7AXX	Ruru	2017/09/27
ALTW	Rita	2017/09/27
	Max	2017/09/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.