




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190184~187	2011/08/29	Jiang Jun Hua	Change SR View
C	LEN1620094~097	2016/01/08	Ruru	Change Logo

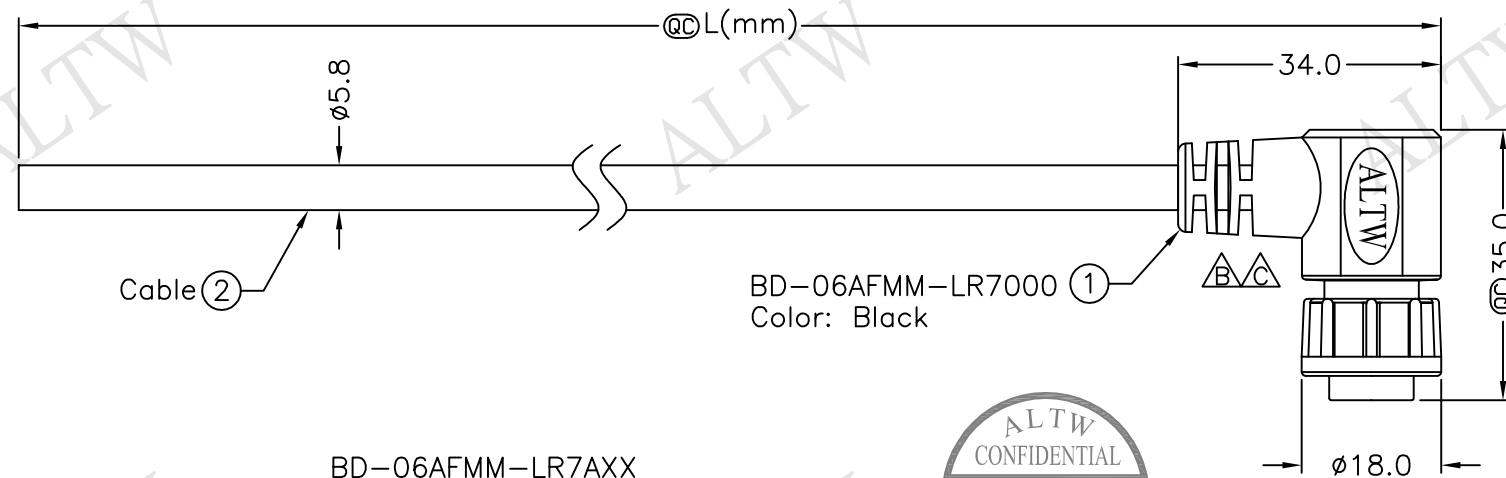


BD-06AFMM-LR7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate:IP67
 - * Housing: Nylon+GF,Black
 - * Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*6C+Drain+Al/My,Black PVC Jacket UV Resistant, OD=5.8
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

6	White	白	△
5	Red	紅	
4	Orange	橙	
3	Yellow	黃	
2	Green	綠	
1	Blue	藍	
Conn.	Wire Color		
	Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	
Standard, Cable Lock 6Pin F Conn M Pin	
SCALE	Free
SHEET	1 OF 1
REV.	C
SIZE	A4
@C	:Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-06AFMM-LR7AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/02/16
DATE	2016/02/16
DATE	2016/02/16

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1 2 3 4 5 6 7 8

F

E

D

C

B

A

1 2 3 4 5 6 7 8

8 FMW10702-01-01A2