


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660206~209	2016/05/30	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

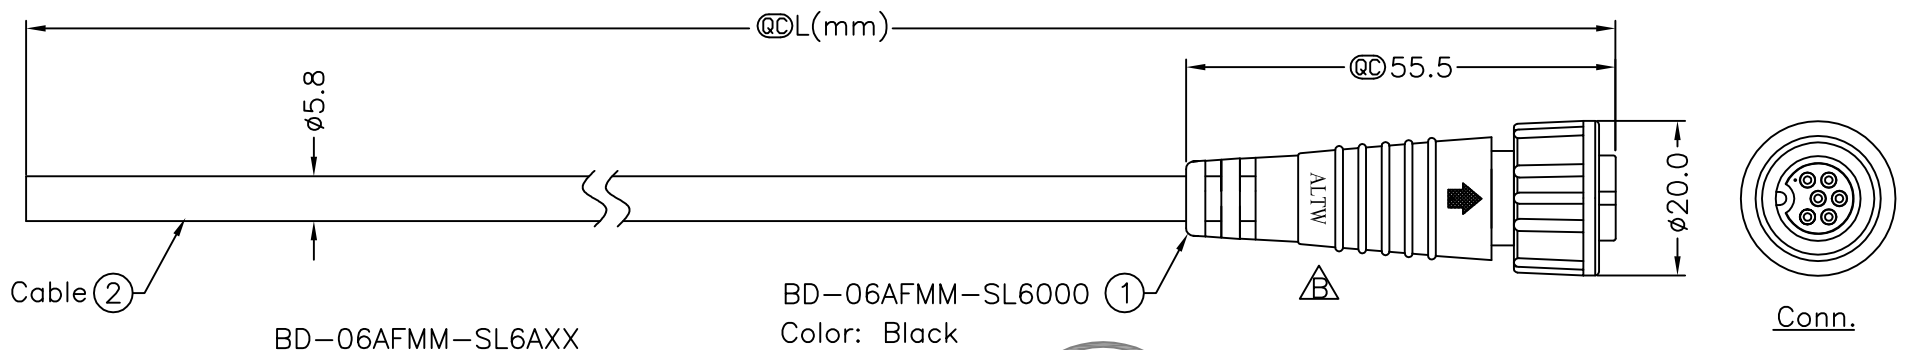


BD-06AFMM-SL6AXX

BD-06AFMM-SL6000 ①
Color: Black


XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
Pin Out	



Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24AWG*6C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 6Pin F Conn M Pin		
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-06AFMM-SL6A <u>XX</u>
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/05/30
DATE	2016/05/30
DATE	2016/05/30

A B C D E F

1 2 3 4 5 6 7 8