

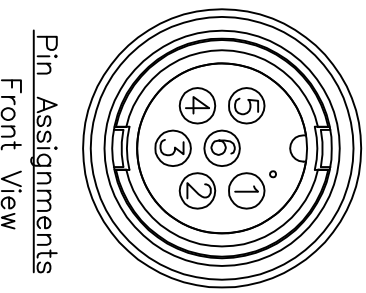
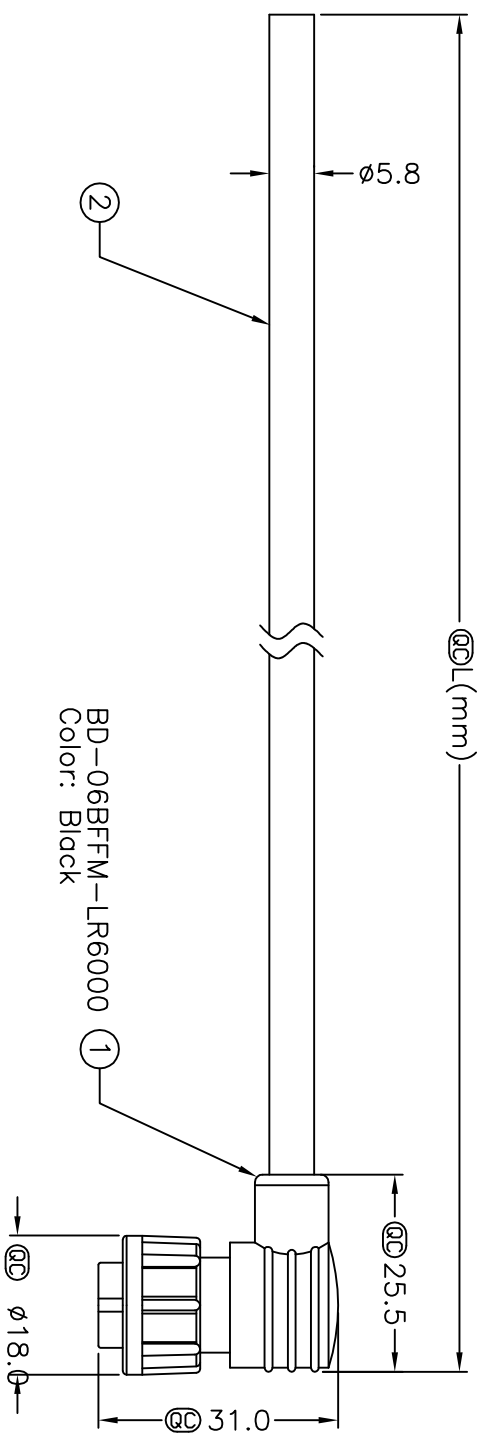



| No. | Item No. | L(mm) | Cut Length(mm) |
|-----|------------------|-----------|----------------|
| 1 | BD-06BFFM-LR6A01 | 1000±50 | 1000±10 |
| 2 | BD-06BFFM-LR6A02 | 2000±100 | 2000±15 |
| 3 | BD-06BFFM-LR6A05 | 5000±250 | 5000±20 |
| 4 | BD-06BFFM-LR6A10 | 10000±500 | 10000±30 |

| REV. | EGN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------|------|-------------|
| | | | | |
| | | | | |



| Pin Assignments | Wire Color |
|-----------------|------------|
| 1 | Blue |
| 2 | Green |
| 3 | Yellow |
| 4 | Orange |
| 5 | Red |
| 6 | White |



Notes:

- * @ Important Dimensions To Check.
- * Waterproof Rate: IP66
- * Housing: Nylon+GF,Black
- * Female Pin: Copper Alloy,Gold Plated
- * Cable: UL2464 24AWG*6C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.8

| | | | | | | | | | | |
|-----------|---------|-------|------------------------------------|-------------------|----------|------------------|-------------|--------|------|------------|
| UNIT:mm | | TITLE | 6Pin F Conn. F Pin(5A) To Cable | | ITEM NO | BD-06BFFM-LR6A01 | DRAWN BY | Rondld | DATE | 2006/04/19 |
| TOLERANCE | ±0.5 mm | SCALE | Free | SHEET 1 OF 1 | DWG NO | BD-06BFFM-LR6A01 | CHECKED BY | Rommel | DATE | 2006/04/19 |
| REV. | A | SIZE | A4 | @ Inspection Item | CUSTOMER | ALTW | APPROVED BY | Win | DATE | 2006/04/20 |

Amphenol LTW

安費諾亮泰企業股份有限公司