


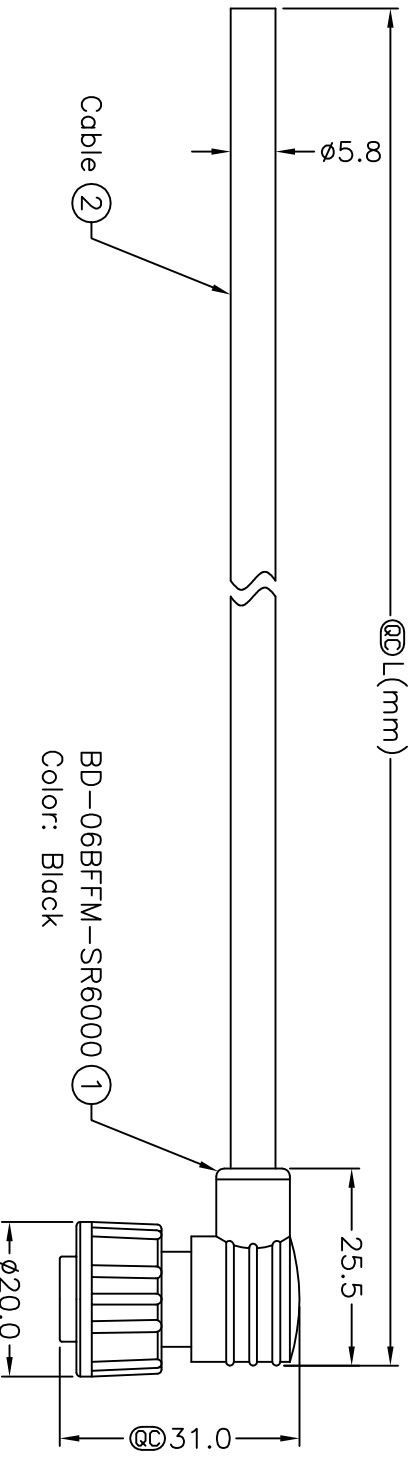


1	2	3	4	5	6	7	8
REV. B	EQN. NO. LEN-770204	DATE 2007/07/11	SIGN J. Espiritu	DESCRIPTION Revise Pin Out			




BD-06BFFM-SR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :



6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color

Note:
 * @Important Dimension.
 * Waterproof Rate: IP66
 * Housing: Black, Nylon+GF
 * Female Pin: Copper Alloy, Gold Plated
 * Cable: Black, UL2464 24AWG*6C+D+Al/My
 PVC Jacket (UV Resistant) OD=5.8mm
 * Cable Length Tolerance:1M~10M±5%,11M~99M±500mm.



Pin Assignments
 Front View

TITLE	Standard Cable Screw 6Pin F Conn. F Pin		
SCALE	F:ree	SHEET 1	OF 1
REV. B	SIZE A4	@ :inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	BD-06BFFM-SR6AXX	DWG NO	BD-06BFFM-SR6AXX	CUSTOMER	ALTW
DRAWN BY	Josephine Espiritu	CHECKED BY	Robert Dabu	APPROVED BY	Win
DATE	2007/07/11	DATE	2006/07/11	DATE	2006/07/11

UNIT:mm	
TOLERANCE	±0.5 mm