
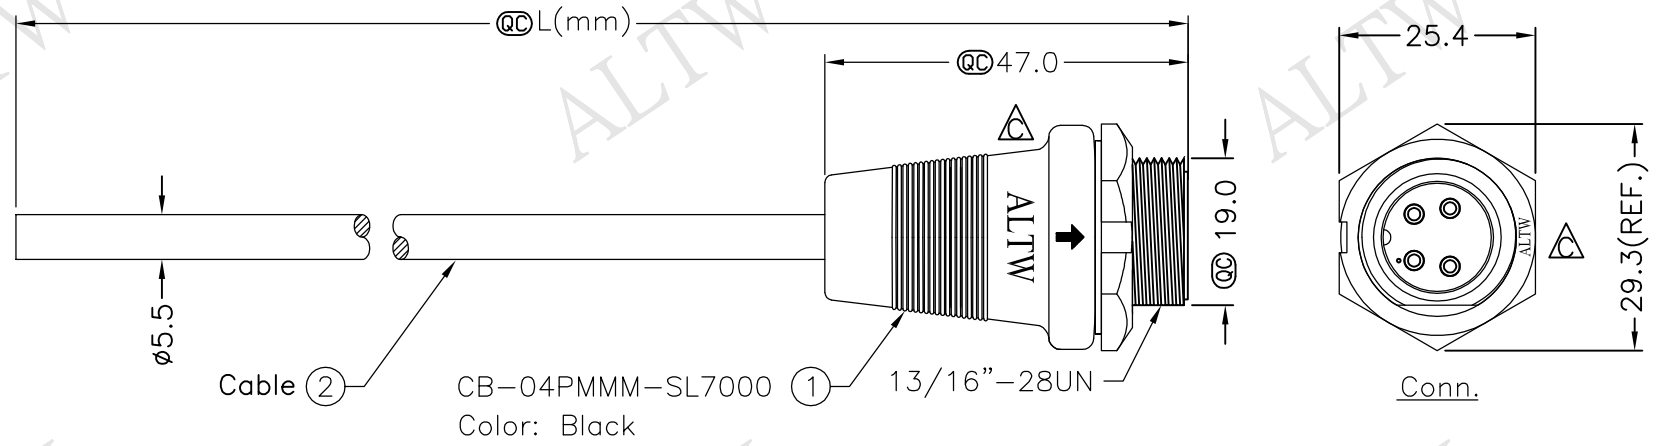



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0092~095	2008/09/25	Shin	Add Note
C	LEN1630296~299	2016/03/09	Ruru	Change Logo & Note



Cable ② CB-04PMMM-SL7000
Color: Black

① 13/16"-28UN


Conn.

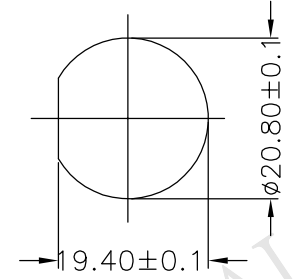

Recommended Panel Cut-Out



CB-04PMMM-SL7AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments Front View

4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 20AWG*4C+D+AL/My, PVC Jacket UV Resistant, OD=5.5, Black
 - △* Use with waterproof cap or dust cap
Panel Thickness Max: 1.2mm
 - △* Use without waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - △* Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE Middle, Cable Screw 4 Pin M Conn. M Pin	<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Ruru	DATE 2016/03/09	
	SCALE Free		SHEET 1 OF 1	DWG NO CB-04PMMM-SL7AXX	CHECKED BY Rtia	DATE 2016/03/09
	REV. C		SIZE A4	◎◎ :Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.