


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650200~203	2016/05/05	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

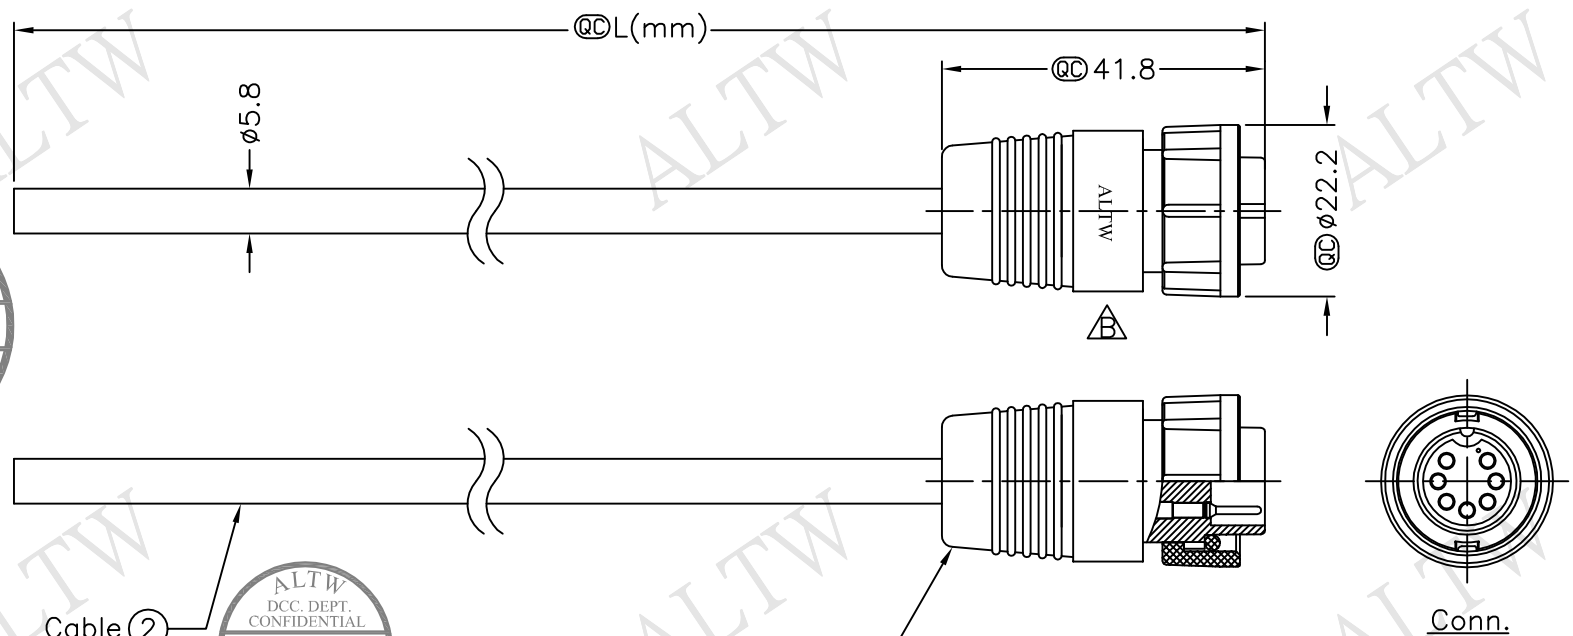

ALTW  
CONFIDENTIAL  
2016.05.05  
R&D DEPT.

ALTW  
DCC. DEPT.  
CONFIDENTIAL  
2016.05.13  
ISSUED

Cable ②


CD-07BFMM-LL6000 ①  
Color: Black

CD-07BFMM-LL6AXX

XX: 01~99Meter  
01: 01Meter  
02: 02Meters  
:  
:  
:  
99: 99Meters

Cable Length(L):01~99Meters

- Note:
- \* Ⓞ Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF,Black
  - \* Male Pin: Copper Alloy,Gold Plated
  - \* Cable: UL2464 24AWG\*7C+D+A (UV Resistant) OD=5.8
  - △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm



Pin Assignments  
Front View

7	White
6	Green
5	Brown
4	Red
3	Yellow
2	Orange
1	Blue
Conn.	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Lock 7Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
Ⓞ :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	CD-07BFMM-LL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/05/05
DATE	2016/05/05
DATE	2016/05/05