

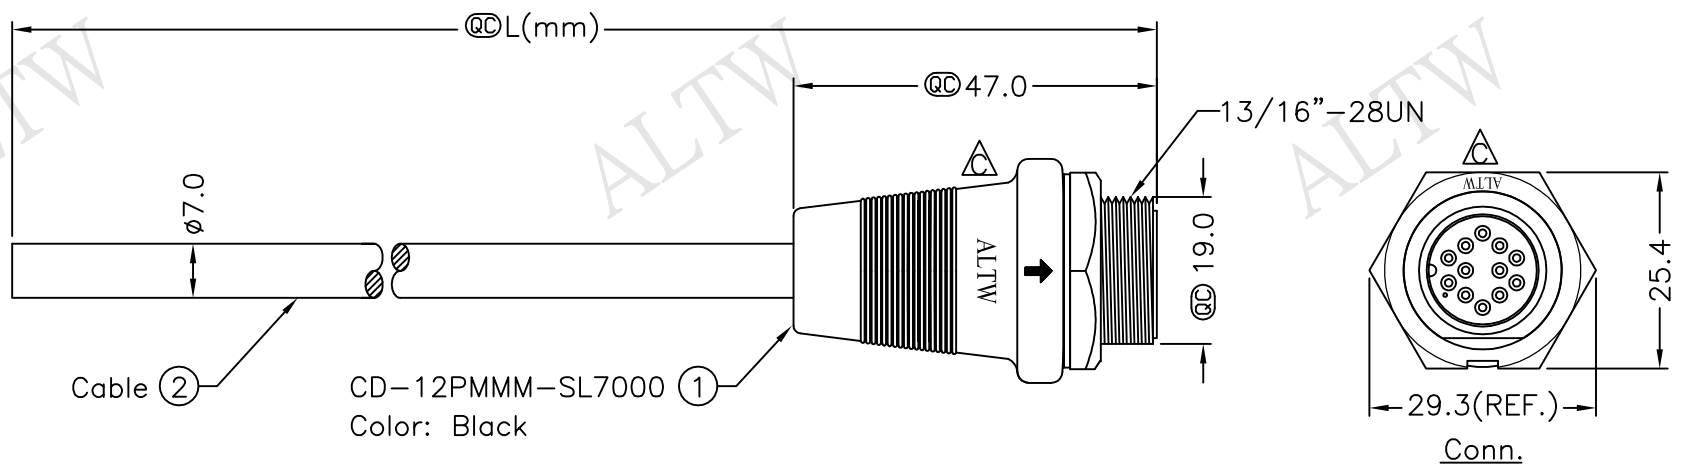


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0142~145	2008/09/25	Shin	Add Note
C	LEN1630264~267	2016/03/01	Ruru	Change Logo & Note




Cable ② CD-12PMMM-SL7000 ①
Color: Black

CD-12PMMM-SL7AXX
XX:01~99Meter
01:01Meter
02:02Meters
⋮
99:99Meters
Cable Length(L):01~99Meters

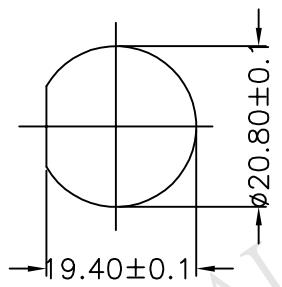

Recommended Panel Cut-Out



Pin Assignments Front View

6	Gray	灰	12	Light Green	淺綠
5	Yellow	黃	11	Purple	紫
4	Green	綠	10	Orange	橘
3	White	白	9	Black	黑
2	Blue	藍	8	Red	紅
1	Brown	棕	7	Pink	粉紅
Conn.	Wire Color	Conn.	Wire Color		

Pin Out

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Male Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*12C+D+AL/My Black,PVC Jacket UV Resistant, OD=7.0
 - △* Use with waterproof cap or dust cap
Panel Thickness Max: 1.2mm
 - △* Use without waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - △* Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Screw 12Pin M Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
QC :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO CD-12PMMM-SL7AXX
CUSTOMER ALTW	

DRAWN BY Ruru	DATE 2016/03/01
CHECKED BY Rita	DATE 2016/03/01
APPROVED BY Lisa	DATE 2016/03/01

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

1
2
3
4
5
6
7
8