



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620190~193	2016/01/15	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

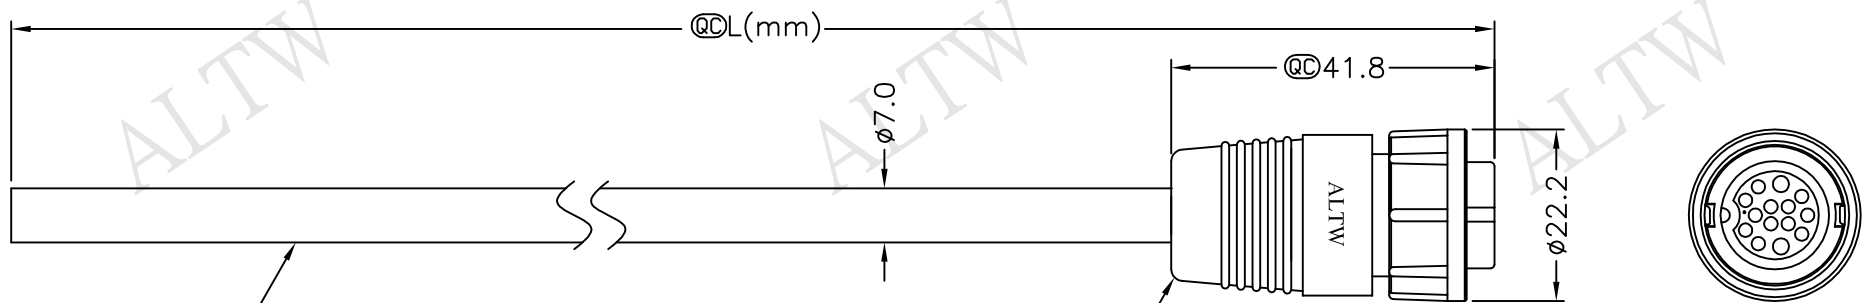


Cable ②

CDU-14BFMM-LL6000 ①
Color: Black



Conn.



CDU-14BFMM-LL6AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

14	Brown/White
13	Black/White
12	Light Green
11	Pink
10	White
9	Gray
8	Purple
7	Blue
6	Green
5	Yellow
4	Orange
3	Red
2	Brown
1	Black
Conn.	Wire Color
	Pin Out

- Notes:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Nut: Nylon+GF, Black
 - * Cable: UL2464 24AWG*14C+D+AL, PVC Jacket UV Resistant, OD=7.0mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Middle
	Cable Lock 14Pin F Conn M Pin
SCALE	Free
SHEET	1 OF 1
REV.	B
SIZE	A4
@C	:Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	CDU-14BFMM-LL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/01/15
DATE	2016/01/15
DATE	2016/01/15