



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380250~253	2013/08/20	Ruru	Change Logo & Modify Note
C	C200907	2020/06/12	Ruru	△X3

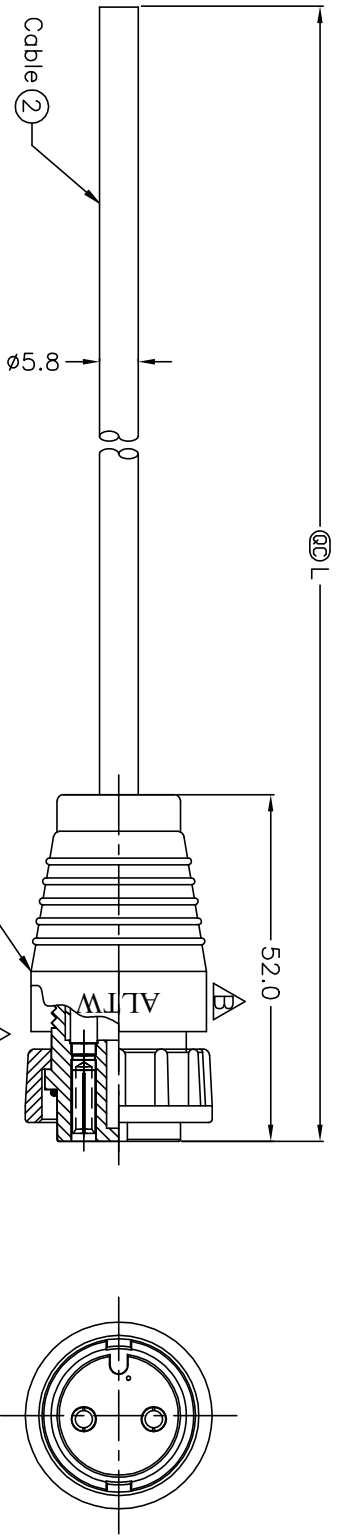


DC-02BFFM-LL6000 (1)
Color: Black

Conn.



DC-02BFFM-LL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
...
99:99Meters
Cable Length(L):01~99 Meter



Black	黑	2
Red	紅	1
Wire Color		Conn.
Pin Out		

Pin Assignments
Front View 前視圖

- △ Note:
- * △ Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing: Thermoplastic, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Ring: Rubber, Black
 - * Lock Nut: Thermoplastic, Black
 - * Cable: UL2464 16AWG*2C+T
 - * UV Resistant OD=5.8mm, Black
- △ Cable Length Tolerance: 01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm

UNIT:mm		TITLE	0 CERES, D-20A, 02P, CABLE W/O SR		ITEM NO	DC-02BFFM-LL6AXX	DRAWN BY	Ruru	DATE	2013/08/20	
TOLERANCE	±0.5 mm	SCALE	1 : 1	F, F, MOLDING, 2LOCK	DWG NO	DC-02BFFM-LL6AXX	CHECKED BY	Vicky	DATE	2013/08/20	
REV.	C	SIZE	A4	SHEET	1 OF 1	CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20

Amphenol LTW
安費諾亮泰企業股份有限公司