




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380266~269	2013/08/20	Ruru	Change Logo & Modify Note
C	C200915	2020/06/17	Ruru	△X3

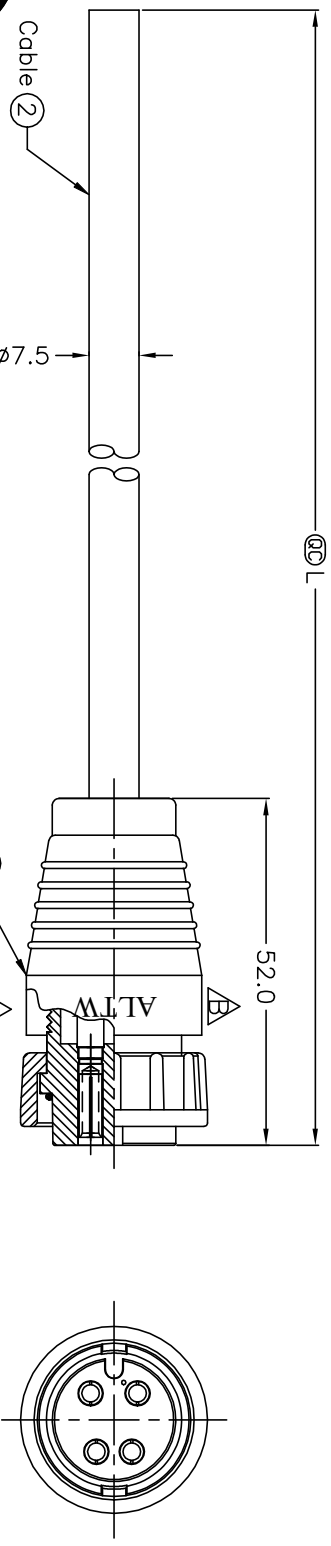

DC-04BFFM-LL6AXX

DC-04BFFM-LL6000  
Color: Black

XX:01~99Meter  
01:01Meter  
02:02Meters  
⋮  
99:99Meters  
Cable Length(L):01~99 Meter



Orange	橙	4
Red	紅	3
Brown	棕	2
Black	黑	1
Wire Color		Conn.
Pin Out		

Pin Assignments  
Front View 前視圖

△ Note:

- \* @Important Dimension.
- \* Waterproof Rate: IP66
- \* Housing: Thermoplastic, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* O-Ring: Rubber, Black
- \* Lock Nut: Thermoplastic, Black
- \* Cable: UL2464 16AWG\*4C+AL/MY
- \* UV Resistant OD=7.5mm, Black
- \* Cable Length Tolerance: 01M:40mm

02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm

UNIT:mm		TITLE	0 CERES, D-20A, 04P, CABLE W/O SR
TOLERANCE	$\pm 0.5$ mm	SCALE	1 : 1
REV.	C	SIZE	A4
		SHEET	1 OF 1
		①	inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DC-04BFFM-LL6AXX	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-04BFFM-LL6AXX	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20