


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380278~281	2013/08/20	Ruru	Change Logo & Modify Note
C	C200914	2020/06/16	Ruru	X3

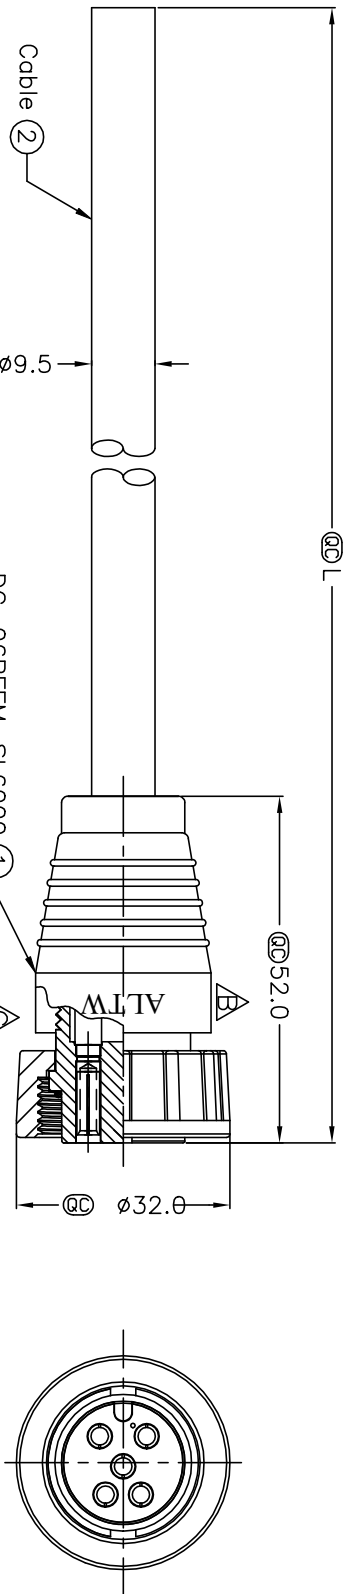


DC-06BFFM-SL6000  
Color: Black

DC-05BFFM-SL6AXX


XX:01~99Meter  
01:01Meter  
02:02Meters

Cable Length(L):01~99 Meter



Pin Assignments  
Front View

White	白	5
Brown	棕	4
Blue	藍	3
Black	黑	2
Red	紅	1
Wire Color		Conn.
Pin Out		



Note:

- \* @ Important Dimension.
- \* Waterproof Rate: IP66
- \* Housing: Thermoplastic, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* O-Ring: Rubber, Black
- \* Screw Nut: Thermoplastic, Black
- \* Cable: UL2464 16AWG\*5C+T
- \* UV Resistant OD=7.8mm, Black
- \* Cable Length Tolerance: 01M:40mm  
02M~05M:60mm  
06M~10M:100mm  
11M~30M:200mm  
31M~99M:500mm

UNIT:mm		TITLE	0 CERES, D-20A, 05P, CABLE W/O SR
TOLERANCE	±0.5 mm	SCALE	1 : 1
REV.	C	SIZE	A4
		SHEET	1 OF 1
		REV.	① inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DC-05BFFM-SL6AXX	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-05BFFM-SL6AXX	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20