


REV.	ECON NO.	DATE	SIGN	DESCRIPTION
B	LEN1380282~285	2013/08/20	Ruru	Change Logo & Modify Note
C	C200915	2020/06/17	Ruru	△XX3

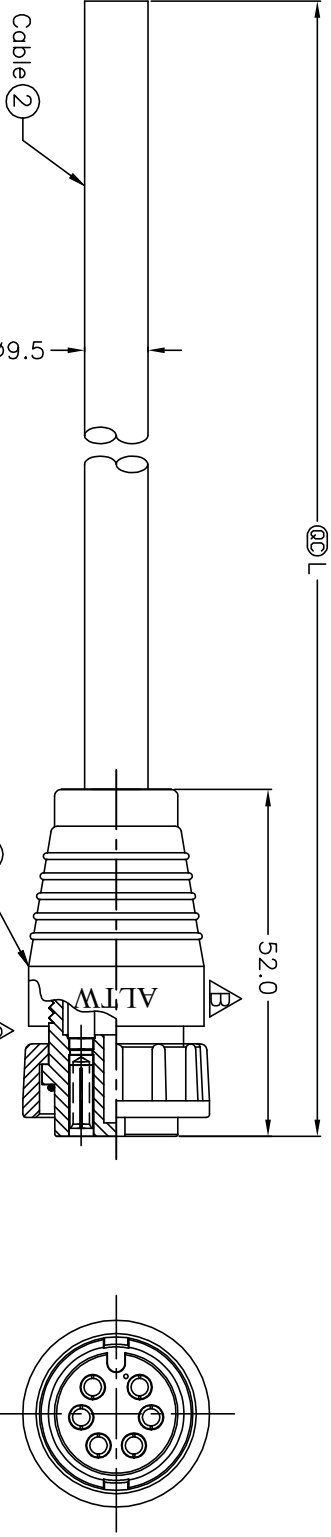

DC-06BFFM-LL6A000

DC-06BFFM-LL60000
Color: Black


Conn.

△ Note:

- * △@Important Dimension.
- * Waterproof Rate: IP66
- * Housing: Thermoplastic, Black
- * Female Pin: Copper Alloy, Gold Plated
- * O-Ring: Rubber, Black
- * Lock Nut: Thermoplastic, Black
- * Cable: UL2464 16AWG*6C+F+D+AL/My
- UV Resistant OD=9.5mm, Black
- * Cable Length Tolerance: 01M:40mm
- 02M~05M:60mm
- 06M~10M:100mm
- 11M~30M:200mm
- 31M~99M:500mm


Cable Length(L):01~99 Meter

- XX:01~99Meter
- 01:01Meter
- 02:02Meters



Pin Assignments
Front View 前视图

Gray	灰	6
Yellow	黄	5
Green	绿	4
White	白	3
Blue	蓝	2
Brown	棕	1
Wire Color		Conn.
Pin Out		



TITLE
0 CERES, D-20A, 06P, CABLE W/O SR
F, F, MOLDING, 2LOCK

SCALE	1 : 1	SHEET	1 OF 1
REV.	C	SIZE	A4
		⑩	Inspection Item

UNIT:mm
TOLERANCE
±0.5 mm

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DC-06BFFM-LL6A000	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-06BFFM-LL6A000	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20