

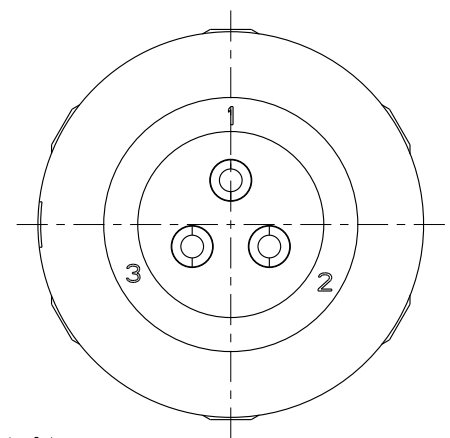
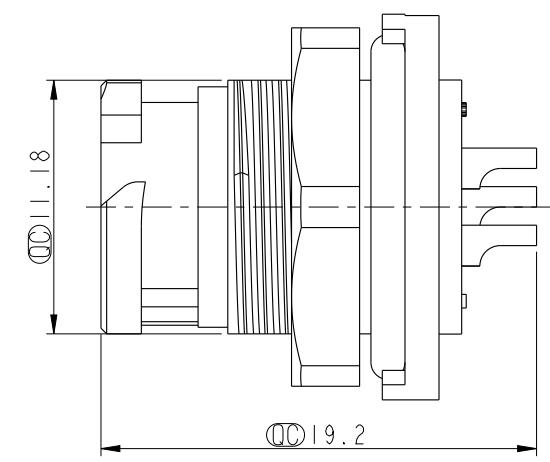
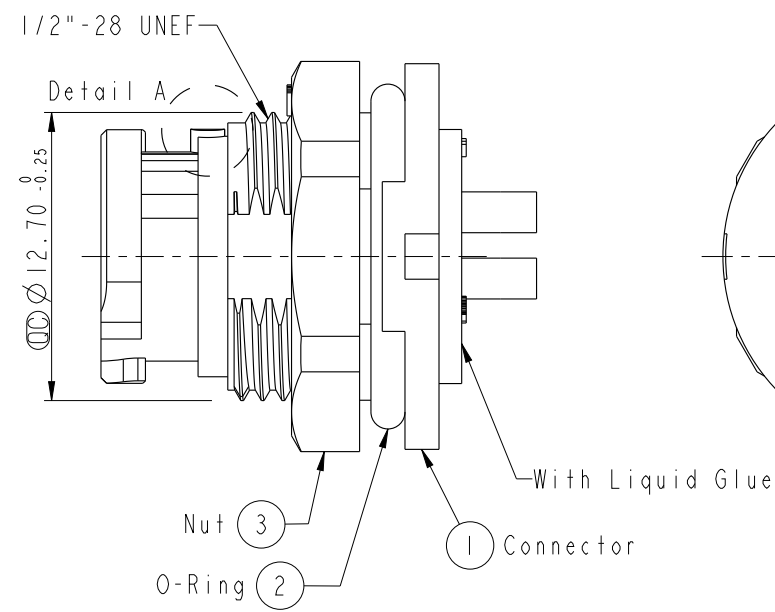
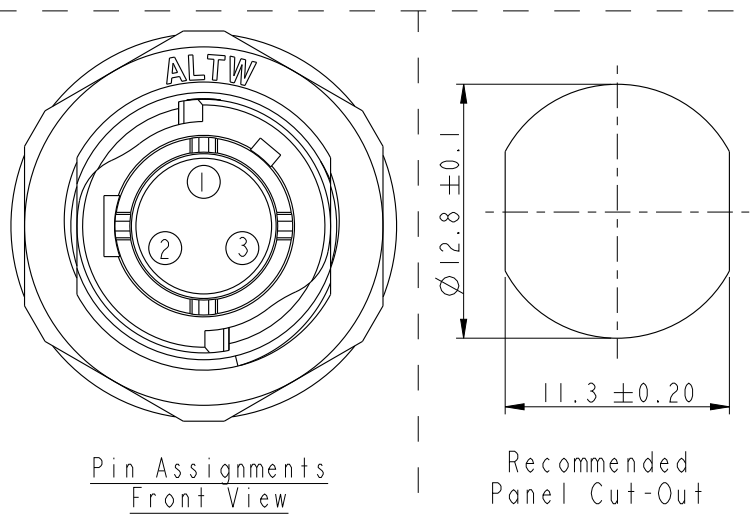


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	CI90315	2019/03/14	Ruru	Modify Note
D	CI90910	2019/06/06	Eric	Increase Dimension
E	CI91169	2019/07/11	Nan_Su	Modify Note

F
E
D
C
B
A

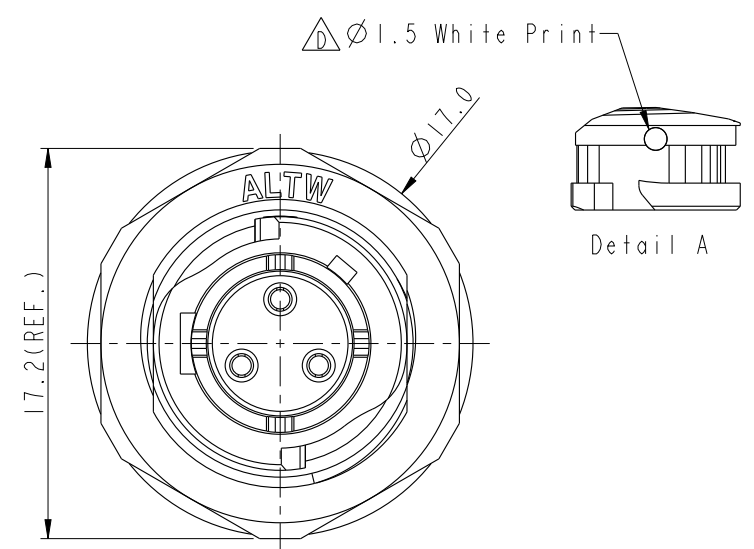

- Note: $\triangle C$
- * ϕ Important Dimension To Check.
 - * Waterproof Rate: IP67, Mated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * O-Ring: Rubber, Gray $\triangle E$
 - * Use With Dust Cap
Panel Thickness Max.: 2.0mm
 - * Use Without Dust Cap
Panel Thickness Max.: 3.0mm
 - * Nut are packed separately in PE bags.

UNIT:mm		TITLE
PANEL,PUSH LOCK,3PIN M CONN F PIN		
TOLERANCE		SCALE
.X ± 0.25		3:1
.XX ± 0.1		SIZE A4
.XXX ± 0.05		SHEET 1 OF 1
ANGLES $\pm 1^\circ$		REV. E
		WC-REV. .0
		ϕ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	PLD-03PMFS-QC7001	DRAWN BY	Nan_Su	DATE	2019-07-11
DWG NO	PLD-03PMFS-QC7001	CHECKED BY	Feng-Li	DATE	2019-07-11
CUSTOMER	ALTW	APPROVED BY	Jerry	DATE	2019-07-11