




1	2	3	4	5	6	7	8
REV.	EQN. NO.	DATE	SIGN	DESCRIPTION			
B	LEN-910082~86	2009/01/08	Vicky	Update the drawing.			
C	LEN-0A0041~45	2010/09/03	Zhang Xing	Change Dimension.			

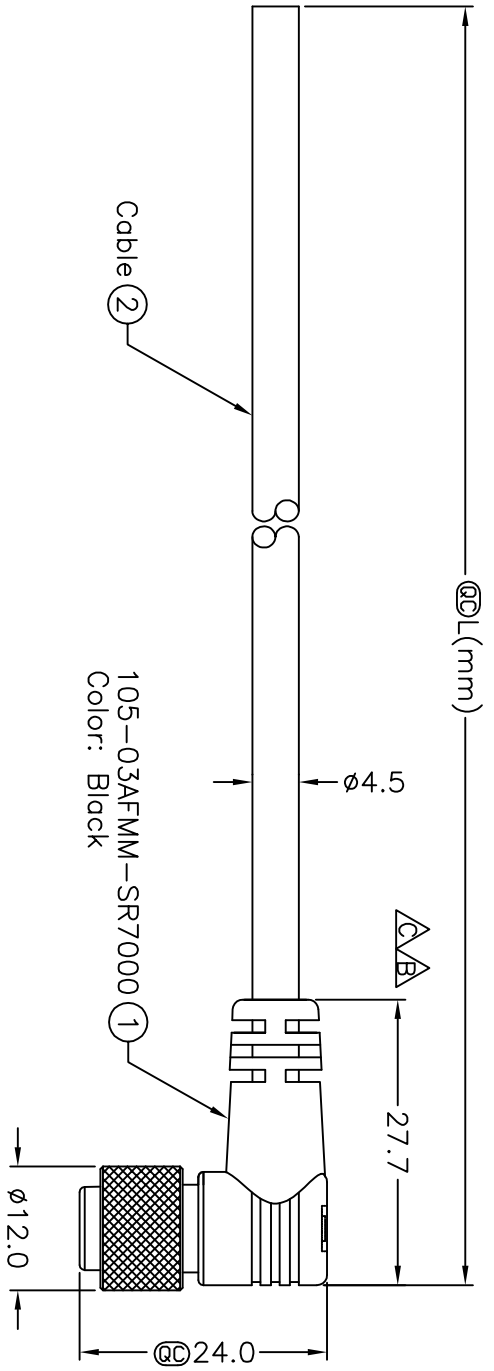

105-03AFMM-SR7AXX

XX:01~99Meters


01:01Meter

02:02Meters

:

99:99Meters

Cable Length(L):01~99Meters



Conn.

Notes:

\* @ Important Dimension.

\* Waterproof Rate:IP67.

\* Connector:Black,Nylon+GF.

\* Male Pin:Copper Alloy,Gold Plated.

\* Cable:UL2464 24AWG\*3C+Talc,Black, PVC Jacket,UV Resistant,OD=4.5mm.


\* Cable Length Tolerance: 01M:±40mm

02M~05M:±60mm

06M~10M:±100mm

11M~30M:±200mm

31M~99M:±500mm



Pin Assignments  
Front View

3	Green	綠
2	Black	黑
1	White	白
Conn.	Wire Color	

Pin Out

UNIT:mm

TITLE  
M10.5 Conn

Cable Screw 3P F Conn M Pin

SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
			@: Inspection Item

±0.5 mm

**Amphenol LTW**

安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	105-03AFMM-SR7AXX	ALTW	Zhang Xing	Tina	Can	2010/09/03
						2010/09/03
						2010/09/03