



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201441	2020/09/17	Vicky	△C X2
D	C210219	2021/03/17	Vicky	△D X4
E	C210796	2021/05/24	Vicky	△E X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

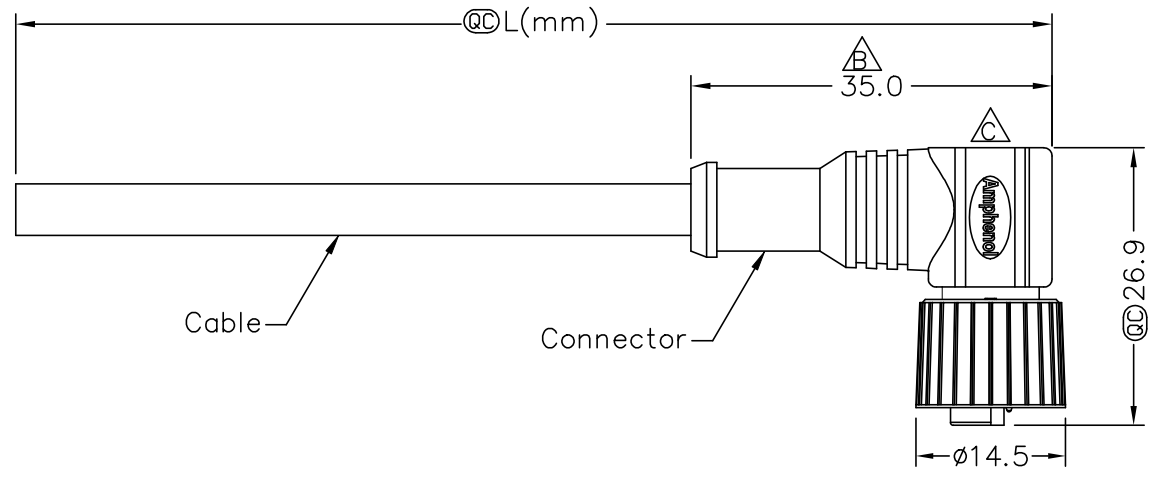

Pin Out	5	Green	綠
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	
Conn.			
	5P		
	Pin Assignments Front View		

△12-XXBFIM-SR8AXX  
 XX: No. Of Pin  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters  
 Cable Length(L): 01~99Meters

- △ Note:
- \* RoHS Compliant
  - \* @C Important dimension
  - \* Waterproof rate: IPX8, mated 1m/24h
  - \* Connector
  - △ Housing: Thermoplastic, Black
  - Pin: Copper alloy, Gold plated
  - O-Ring: Rubber, Green
  - Nut: Metal
  - Outer mold: Thermoplastic, Black
  - \* Cable: UL2464, 22#\*5C+Talcum, OD=5.5mm, PVC Jacket, UV Resistant, Black
  - △ \* Cable length tolerance:
    - 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - △ 30M < L ≤ 99M: ±500 mm

UNIT: mm		TITLE	O SEN, M12 A (I) △△		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	CABLE W/O SR, F, I, MOLDING		<b>Amphenol LTW</b>	△12-XXBFIM-SR8AXX	Prune	2009/01/14
		SCALE	Free	SHEET 1 OF 1	CUSTOMER	Tina	2009/01/16
		REV.	E	SIZE A4	ALTW	Luke	2009/03/26
		@C : Inspection Item		安費諾亮泰企業股份有限公司			