
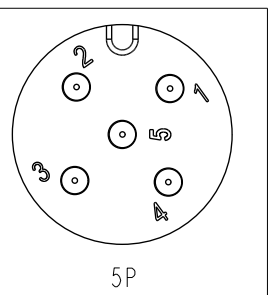
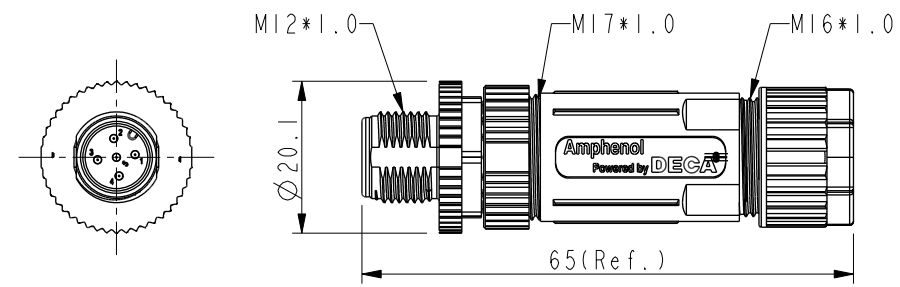


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201472	2020/09/28	Vicky	△C X4
D	C210020	2021/01/07	Vicky	△D X1
E	C210561	2021/04/12	Vicky	△E X3

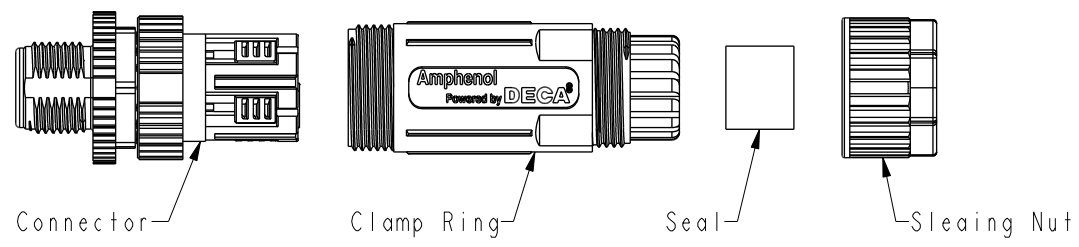

5P  
Pin Assignments  
Front View

△C M12A-XXBMME-SL8001  
XX: No. Of Pin

△B △E

Note:

- \* RoHS Compliant
- \* ⌀ Important Dimension
- \* Waterproof rate: IPX8, mated 1m/24h
- \* Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Thermoplastic, Black
- Nut: Metal
- O-Ring: Rubber, Gray
- \* Clamp Ring: Thermoplastic, Black
- \* Sealing Nut: Thermoplastic, Black
- \* Seal: Rubber, Gray, OD: ⌀4.0mm~⌀8.0mm
- \* One set unassembled in one pe bag

△C △D

UNIT:mm		TITLE	N SEN, M12 A, SCREW CABLE W/O SR, M, M, FI PUSHIN	
TOLERANCE		SCALE	SIZE	SHEET
.X ±0.25		1:1	A4	1 OF 1
.XX ±0.1		REV.	WC-REV.	QC: Inspection item
.XXX ±0.05		E	A.4	
ANGLES ±1°				

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Allen Pan	2019-05-30
DWG NO	CHECKED BY	DATE
△C M12A-XXBMME-SL8001	Fred Lee	2019-05-30
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2019-05-30