


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/04/30	Allen Pan	Rev.01 To Rev.A
B	C201753	2020/11/12	Vicky	△ X3
C	C210550	2021/04/07	Vicky	△ X2

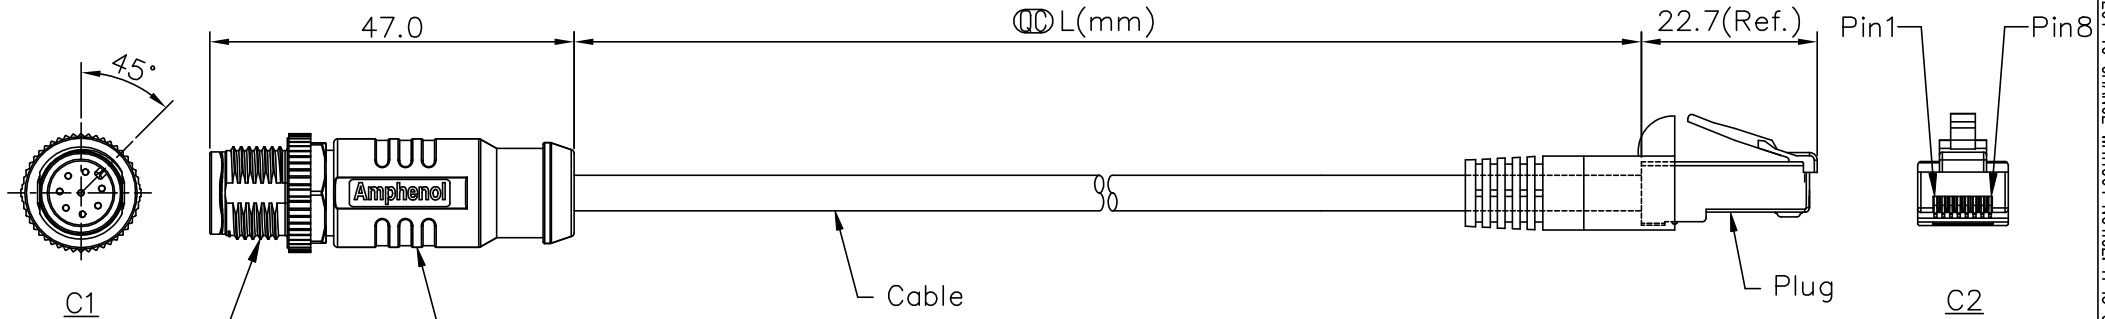

△ MSASXML-SPBML-SEXXX  
 XX: No. Of Pin      XXX: 0.5~40Meters  
 A05: 0.5Meter  
 001: 01Meter  
 002: 02Meters  
 :  
 :  
 040: 40Meters

- △ Note:
- \* RoHS Compliant
  - \* ∅ Important dimension
  - \* C1  
 Waterproof rate: IPX8, mated 1m/24h  
 Housing: Thermoplastic, Black  
 Pin: Copper alloy, Gold plated  
 Nut: Metal  
 Shield: Metal  
 Outer mold: Thermoplastic, Black
  - \* C2  
 Waterproof rate: Non-Waterproof  
 Plug: RJ45, Shielded
  - \* Cable: CAT-5E, FTP, 24#\*4P+Al/My+D, PVC Jacket, OD=6.5mm, Black
  - \* Cable length tolerance:  
 0.5M < L ≤ 1M: +60/-0 mm  
 1M < L ≤ 3M: +120/-0 mm  
 3M < L ≤ 5M: +160/-0 mm  
 5M < L ≤ 10M: ±100 mm  
 10M < L ≤ 20M: ±200 mm  
 20M < L ≤ 30M: ±300 mm  
 30M < L ≤ 40M: ±500 mm

Shield	Drain	地線	Shield	
3	Brown	棕	8	Twist
2	White/Brown	白/棕	7	
8	Green	綠	6	Twist
5	White/Green	白/綠	3	
7	Blue	藍	4	Twist
1	White/Blue	白/藍	5	
4	Orange	橘	2	Twist
6	White/Orange	白/橘	1	
C1	Wire Color		C2	



UNIT:mm	TOLERANCE ±0.5 mm	TITLE ACC, SEN, A Code, DB-ENDED MM	 <b>安費諾亮泰企業股份有限公司</b>		ITEM NO	DRAWN BY Allen Pan	DATE 2020-04-30
SCALE Free	SHEET 1 OF 1	REV. C	SIZE A4	◎: Inspection Item	DWG NO △ MSASXML-SPBML-SEXXX	CHECKED BY Sam Ho	DATE 2020-04-30
					CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-04-30