



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201786	2020/11/16	Ruru	$\triangle B$ X3
C	C210497	2021/03/31	Ruru	$\triangle C$ X2

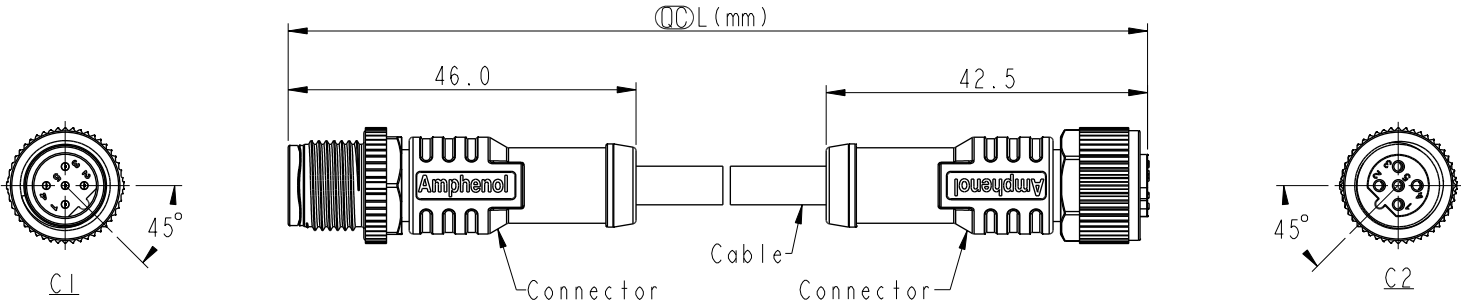

Pin Out	5	Gray	灰
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	
C2	<p>5P</p>		
C1	<p>5P</p>		

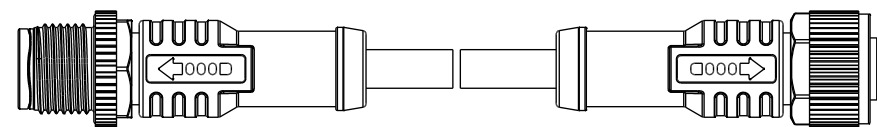

$\triangle B$ MSBPXXML-SBPFL-SBXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

Note: $\triangle B$ $\triangle C$
 * RoHS Compliant
 * \varnothing Important dimension
 * C1
 Waterproof rate: IPX8, mated 1m/24h
 IPX9K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * C2
 Waterproof rate: IPX8, mated 1m/24h
 IPX9K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Green
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * Cable: UL20549, 22#5C, OD=4.4mm, PUR Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE ACC, SEN, B Code, DB-ENDED MF $\triangle C$			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV.	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2018-12-10
DWG NO $\triangle B$ MSBPXXML-SBPFL-SBXXX	CHECKED BY Rita	DATE 2018-12-10
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-10