
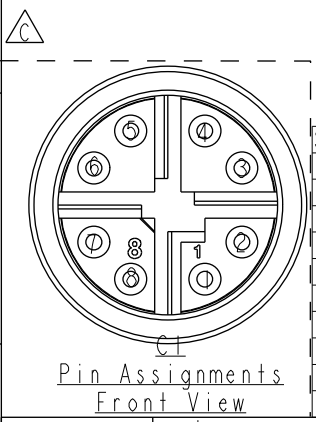
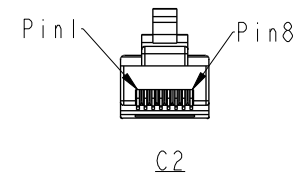


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021/02/23	Vicky	Initial Released
B	C210337	2021/03/08	Vicky	Old Item No. MSXSXXML-SPBML-SGXXX
C	C220546	2022/03/31	Arvin Chan	*3

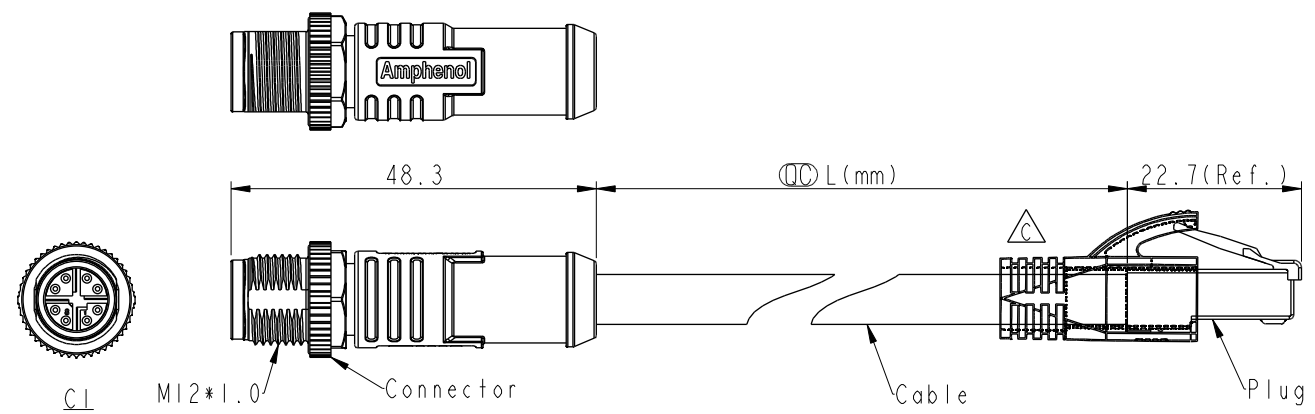

Shield	Braid	編織	Shield	
6	Brown	棕	8	Twist
5	White/Brown	白/棕	7	Twist
4	Green	綠	6	Twist
3	White/Green	白/綠	3	Twist
8	Blue	藍	4	Twist
7	White/Blue	白/藍	5	Twist
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
CI	Wire Color		C2	

MSXSXXML-SPBML-SXXXX
 XX: No. Of Pin
 XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meter
 :
 :
 040: 40Meters

Note:
 * RoHS Compliant
 * Important Dimension.
 * CI
 Waterproof rate: IPX7, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * C2
 Waterproof Rate: Non-Waterproof
 Plug: RJ45, Shielded
 * Cable: CAT-6A, 26#*4P+AL/MY+B

 TPU Jacket, OD=6.8, Green.
 * Cable Length Tolerance:
 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 40M: ±500 mm

UNIT:mm		TITLE ACC, SEN, X Code, DB-ENDED MM	
TOLERANCE	±0.5 mm	SCALE Free	SIZE A4
REV. C	WC-REV. A.1	SHEET 1	OF 1
		: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2021-02-23
DWG NO MSXSXXML-SPBML-SXXXX	CHECKED BY Rita	DATE 2021-02-23
CUSTOMER ALTW	APPROVED BY Max	DATE 2021-02-23