



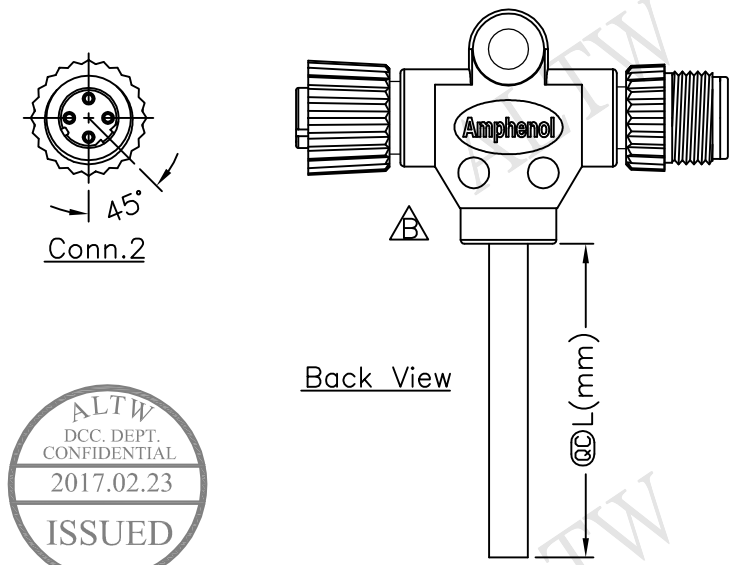


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720110~113	2017/02/09	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

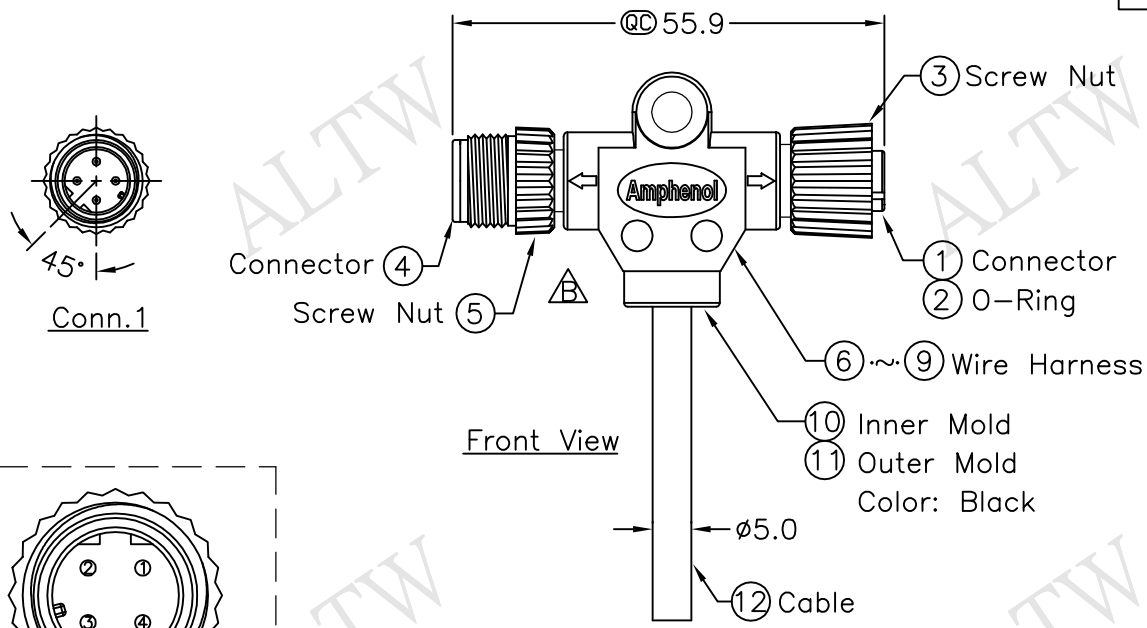

PD-040400-MF0-TSAXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \*  $\text{QC}$  Important Dimension.
  - \* Waterproof Rate: IP68
  - \* Housing: Black, Polyurethane
  - \* Screw Nut: Black, Nylon+GF
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Wire Harness: UL1007 24AWG
  - \* Cable: Black, UL2464 22AWG\*4C+Talc PVC Jacket UV Resistant OD=5.0mm
  - \* Cable Length Tolerance: 01M:  $\pm 40\text{mm}$   
 02M~05M:  $\pm 60\text{mm}$   
 06M~10M:  $\pm 100\text{mm}$   
 11M~30M:  $\pm 200\text{mm}$   
 31M~99M:  $\pm 500\text{mm}$

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm	
TOLERANCE	$\pm 0.5 \text{ mm}$

TITLE M12 Conn T Cable Screw FM Conn FM Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
QC :Inspection Item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru
DWG NO PD-040400-MF0-TSAXX	CHECKED BY Rita
CUSTOMER ALTW	APPROVED BY Max

DATE 2017/02/09
DATE 2017/02/09
DATE 2017/02/09