



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720114~117	2017/02/09	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

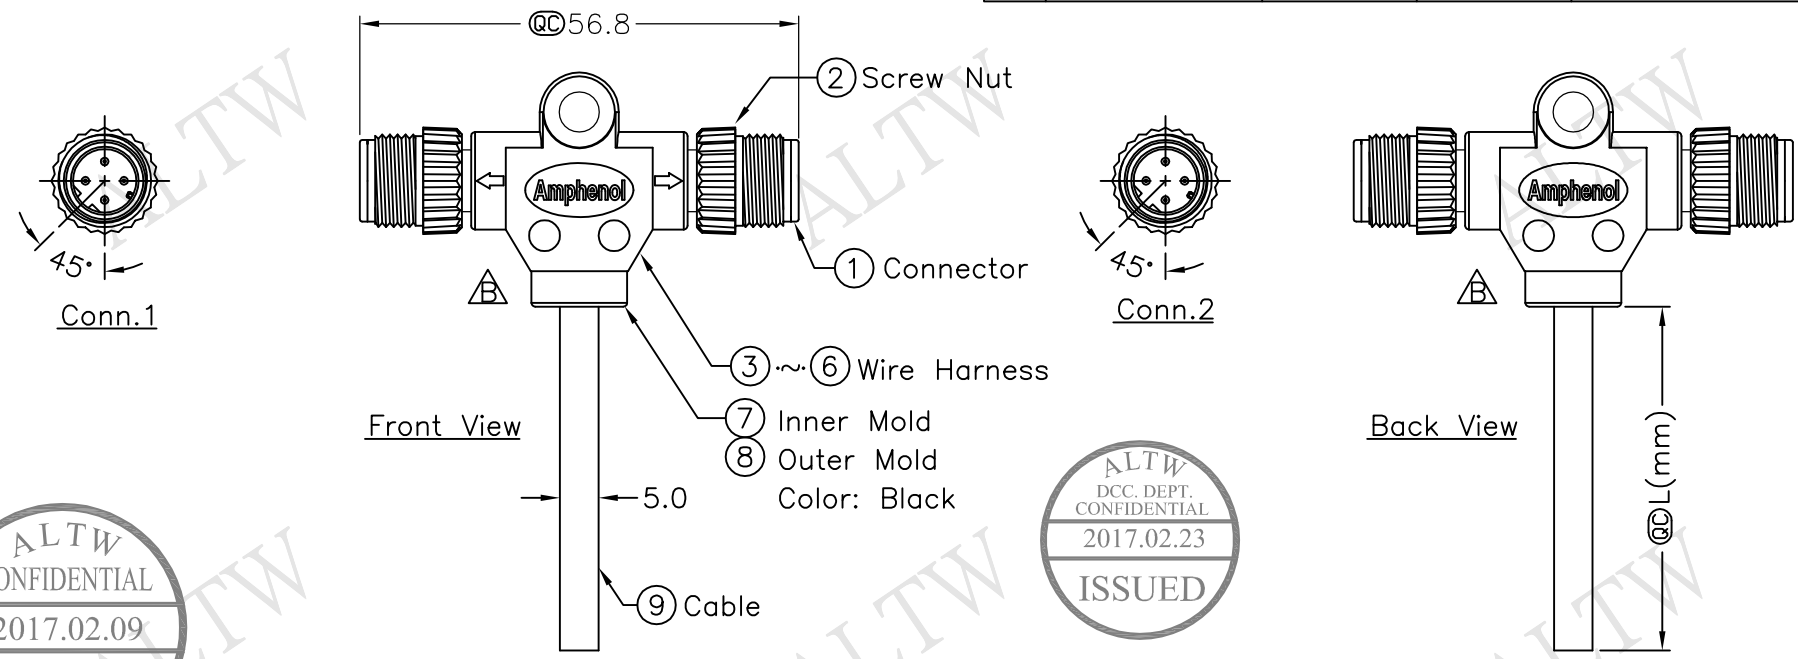

PD-040400-MM0-TSAXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * Ⓞ Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Screw Nut: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG
 - * Cable: Black, UL2464 22AWG*4C+Talc PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Conn. 1&2
Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE M12 Conn T Cable Screw MM Conn MM Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
Ⓞ :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/02/09
DWG NO PD-040400-MM0-TSAXX	CHECKED BY Rita	DATE 2017/02/09
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/02/09