





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720178~181	2017/02/10	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

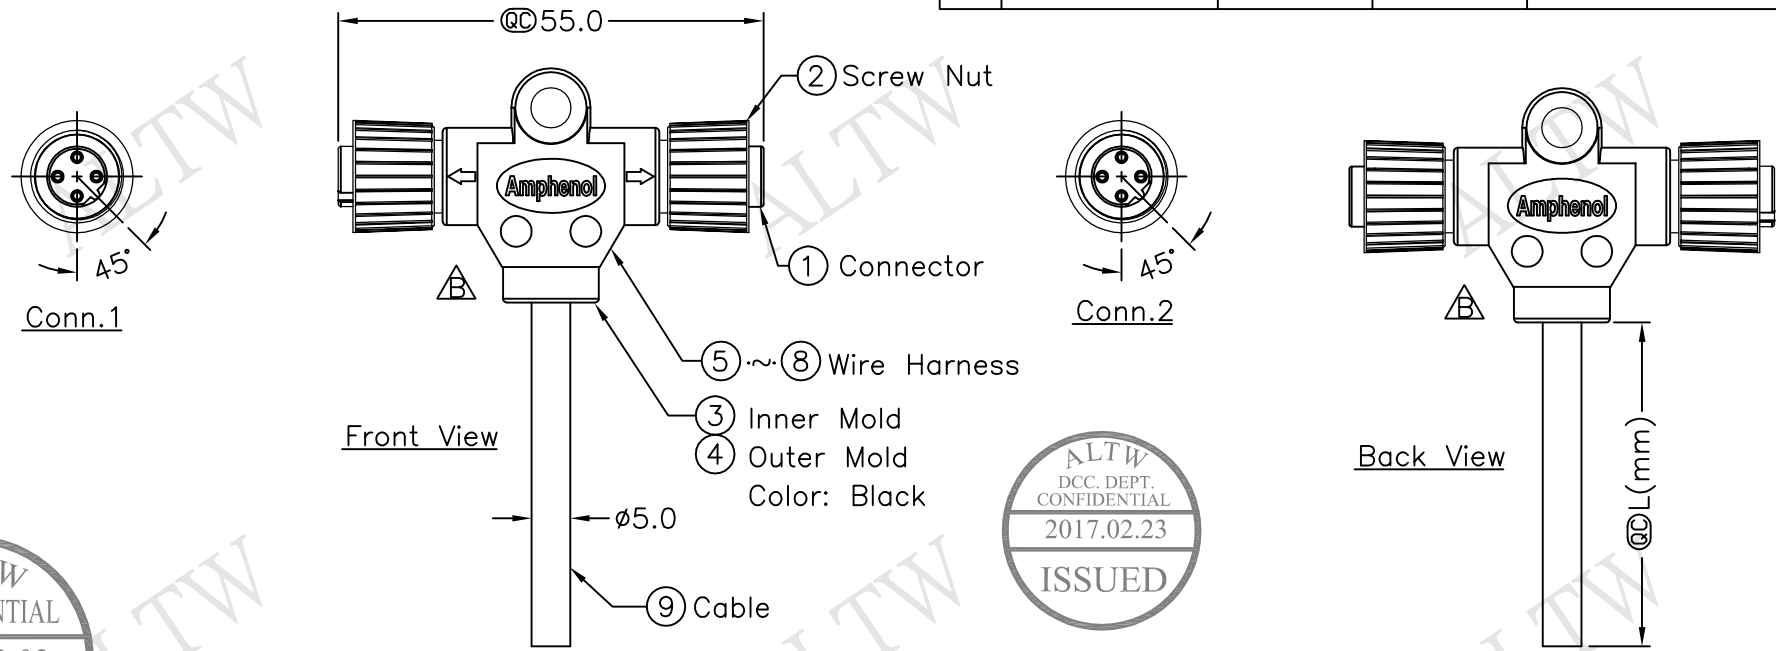

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

SB-040400-FF0-TSAXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \*  $\text{QC}$  Important Dimension.
  - \* Waterproof Rate: IP68
  - \* Housing: Black, Polyurethane
  - \* Screw Nut: Zinc Alloy, Nickel Plated
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Wire Harness: UL1007 24AWG, 4Pcs
  - \* Cable: UL2464 22AWG\*4C+Talc  
 Black, PVC Jacket UV Resistant OD=5.0mm
  - \* Cable Length Tolerance: 01M:  $\pm 40\text{mm}$   
 02M~05M:  $\pm 60\text{mm}$   
 06M~10M:  $\pm 100\text{mm}$   
 11M~30M:  $\pm 200\text{mm}$   
 31M~99M:  $\pm 500\text{mm}$

UNIT:mm	
TOLERANCE	$\pm 0.5 \text{ mm}$

TITLE		M12B Conn	
T Cable Screw FF Conn FF Pin			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
		$\text{QC}$	:Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	SB-040400-FF0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2017/02/10
CHECKED BY	Rita	DATE	2017/02/10
APPROVED BY	Max	DATE	2017/02/10

1  
F  
E  
D  
C  
B  
A

2  
3

4  
5  
6  
7  
8

9

10