




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720265~268	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

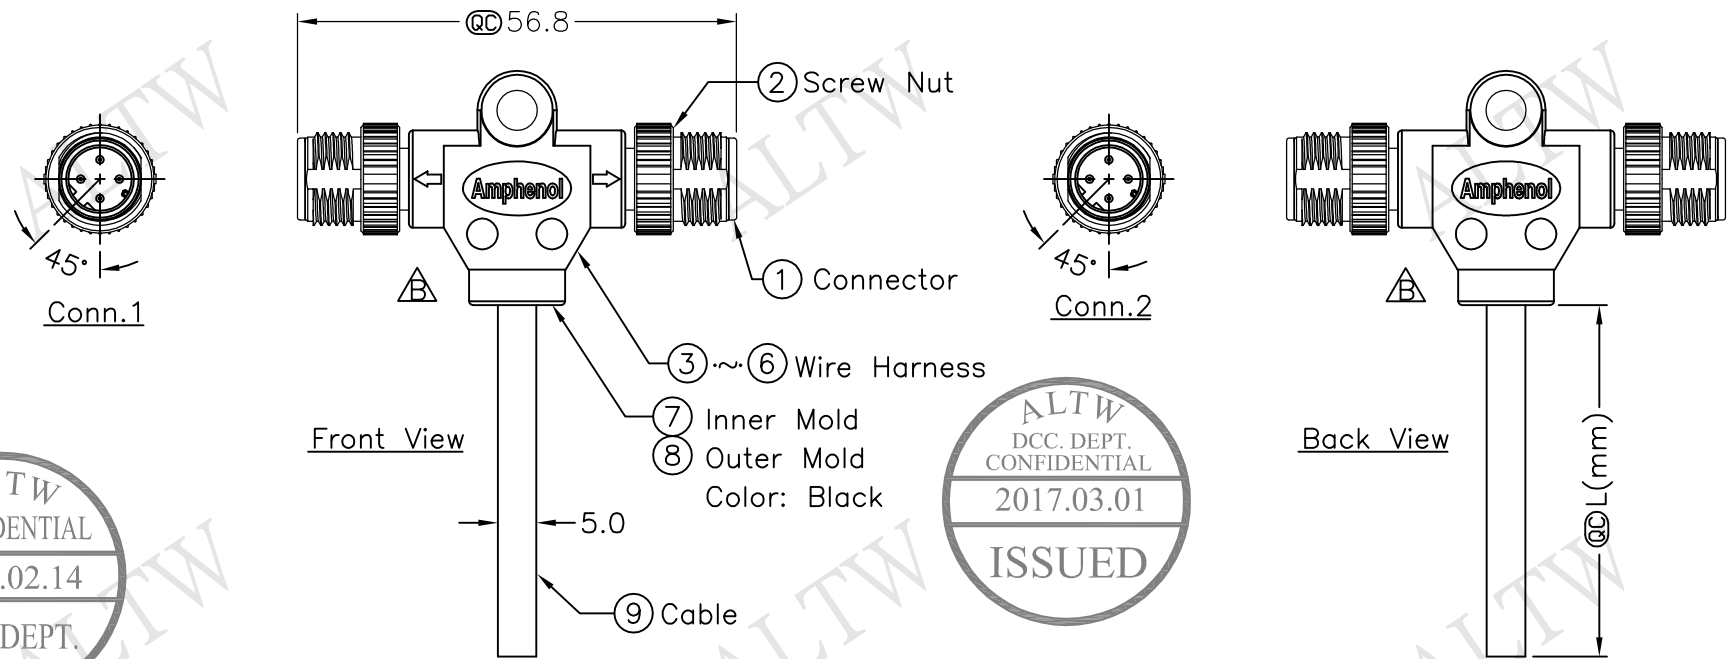

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Shielded Nut: Zinc Alloy, Nickel Plated
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG
 - * Cable: Black, UL2464 22AWG*4C+Talc PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: 01M: $\pm 40\text{mm}$
 02M~05M: $\pm 60\text{mm}$
 06M~10M: $\pm 100\text{mm}$
 11M~30M: $\pm 200\text{mm}$
 31M~99M: $\pm 500\text{mm}$

SD-040400-MM0-TSAXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

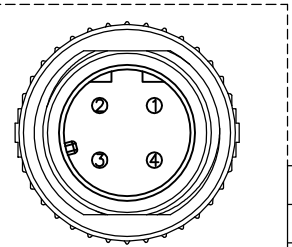

Conn. 1&2
Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm		TITLE	M12 Conn T Cable Screw MM Conn MM Pin	Amphenol LTW	ITEM NO	SD-040400-MM0-TSAXX	DRAWN BY	Ruru	DATE	2017/02/14	
TOLERANCE	$\pm 0.5 \text{ mm}$	SCALE	Free	SHEET	1 OF 1	CUSTOMER	ALTW	CHECKED BY	Rita	DATE	2017/02/14
REV.	B	SIZE	A4	QC	Inspection Item			APPROVED BY	Max	DATE	2017/02/14

Amphenol LTW
 安費諾亮泰企業股份有限公司