




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0203~06	2013/09/14	Cary	Change Logo From LTW To Amphenol

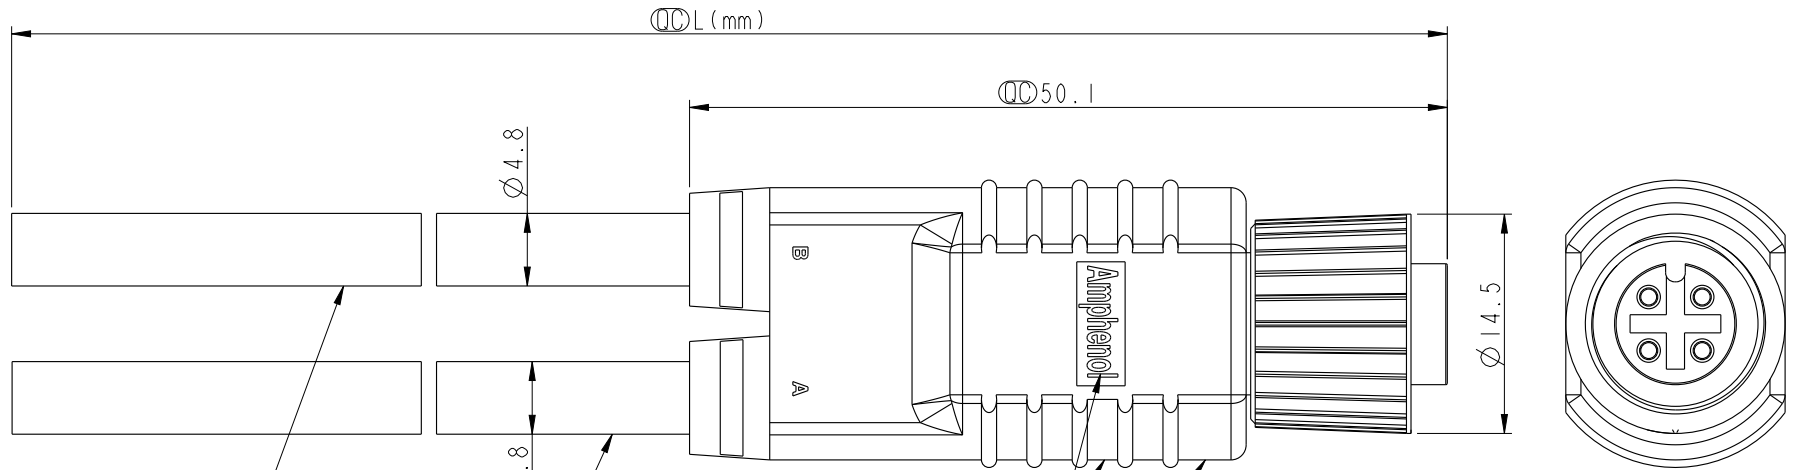

Logo in both sides
兩面Logo

SS-040000-F00-YS000
Color:Black
SS-040000-F00-YSBXX
XX:01~99Meters
01:01Meter
02:02Meters
.....
99:99Meters
Cable Length(L):01~99Meters

Note:
 * \varnothing Important Dimension To Check.
 * Waterproof Rate:IP68
 IP68:1M Depth Of Water In 24hours.
 * Housing:PU,Black.
 * Female Pin:Copper Alloy,Gold Plated.
 Cable: 22AWG*4C+INSULATION
 OD=4.8mm, Black
 * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

4	Blue	藍	Blue	藍
3	White	白	White	白
2	Black	黑	Black	黑
1	Brown	棕	Brown	棕
		A		B
Conn.	Wire Color		Pin Out	

UNIT:mm
 TOLERANCE ±0.5mm

TITLE M12 Cable Screw 4Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.3	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_liu	DATE 2013/09/14
DWG NO SS-040000-F00-YSBXX	CHECKED BY Mafei	DATE 2013/09/14
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/09/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.