
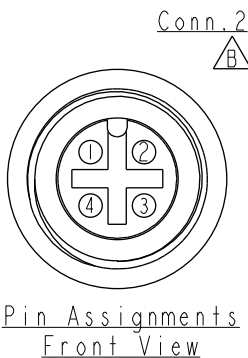



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880177~180	2008/03/12	Zhang Jin	Add Cross.
C	LEN1520128~131	2015/01/29	Sam	Update Logo & View & Note
D	LEN1720329~332	2017/02/15	Ruru	Change Outer Mold Design

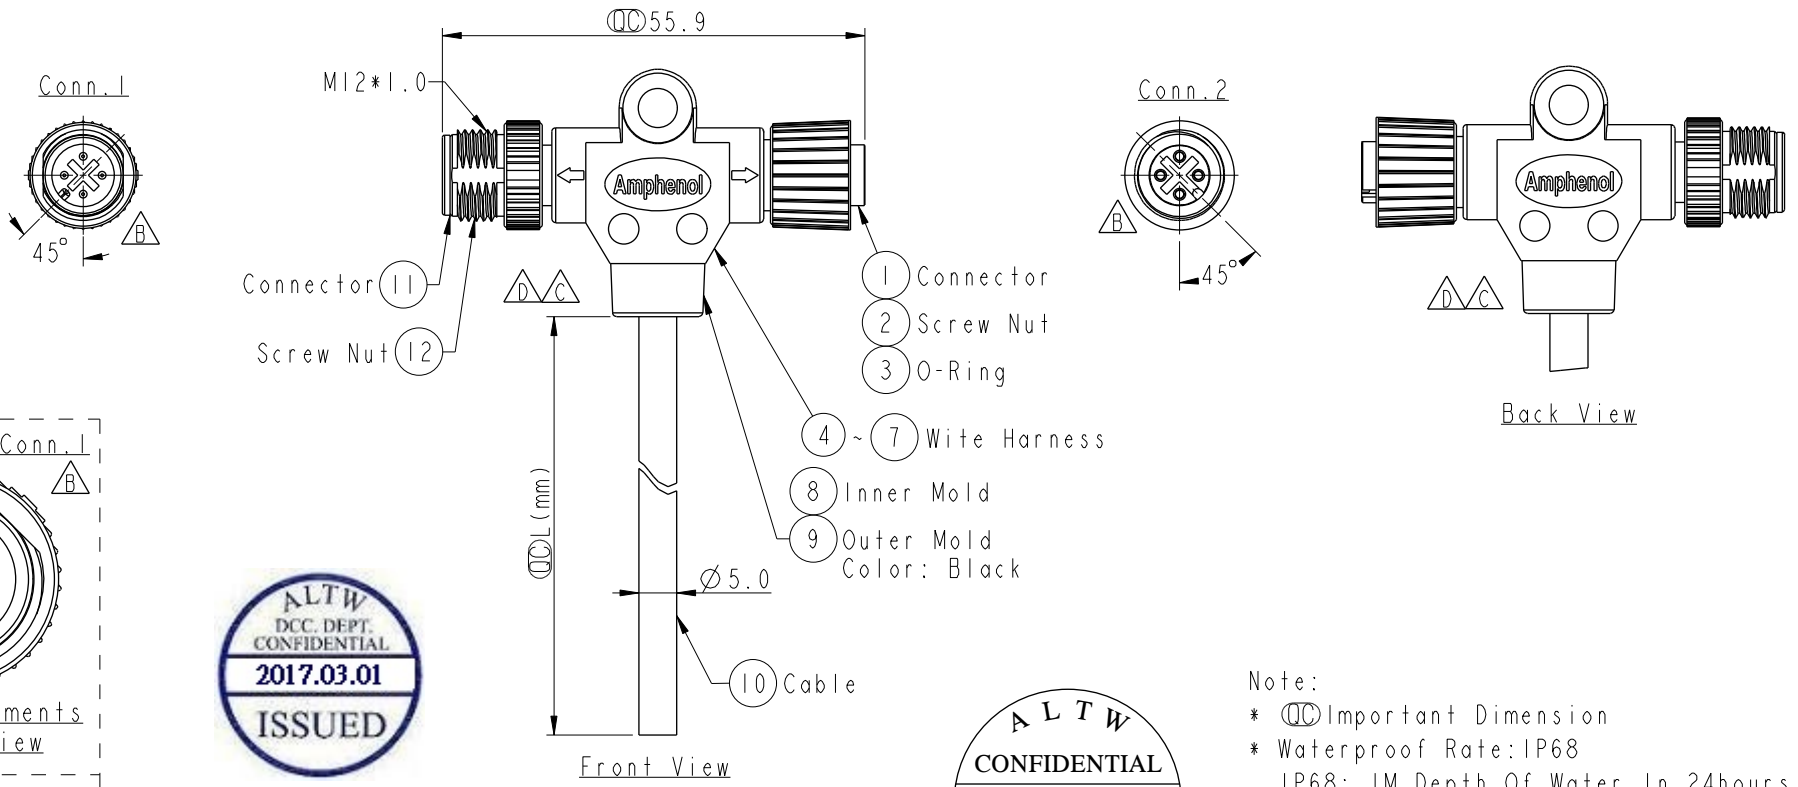

Wire Color	Pin Out
4 Black 黑	4
3 Blue 藍	3
2 White 白	2
1 Brown 棕	1
Conn.1 Wire Color	Conn.2

SS-040400-MF0-TSAXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meter
 ...
 99: 99Meter
 Cable Length(L): 01~99Meters



Note:
 * \varnothing Important Dimension
 * Waterproof Rate: IP68
 IP68: 1M Depth Of Water In 24hours
 * Housing: PU, Black
 * Pin: Copper Alloy, Gold Plated
 * Wire Harness: UL1007 24AWG, 4Pcs
 * Cable: UL2464 22AWG*4C+Talc, Black, PVC Jacket, UV Resistant, OD=5.0mm
 * Cable Length Tolerance:
 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT:mm TOLERANCE ± 0.5 mm	TITLE M12P Conn T Cable Screw MF Conn MF Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO SS-040400-MF0-TSAXX	DRAWN BY Ruru	DATE 2017-02-15
	SCALE 1:1	SIZE A4	SHEET 1 OF 1			DWG NO SS-040400-MF0-TSAXX	CHECKED BY Rita	DATE 2017-02-15
	REV. D	WC-REV. A.1	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2017-02-15		

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.