

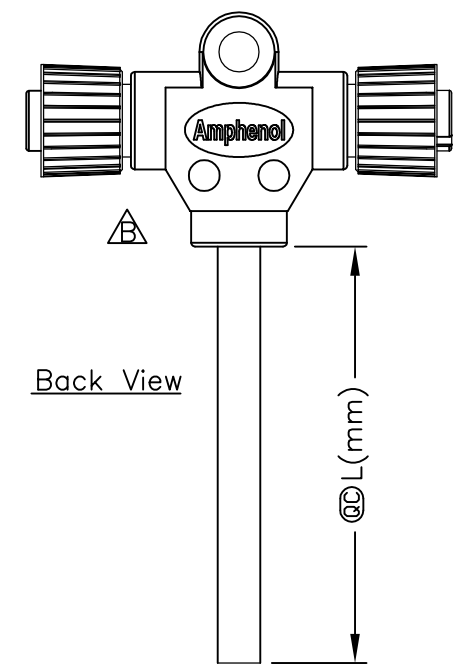
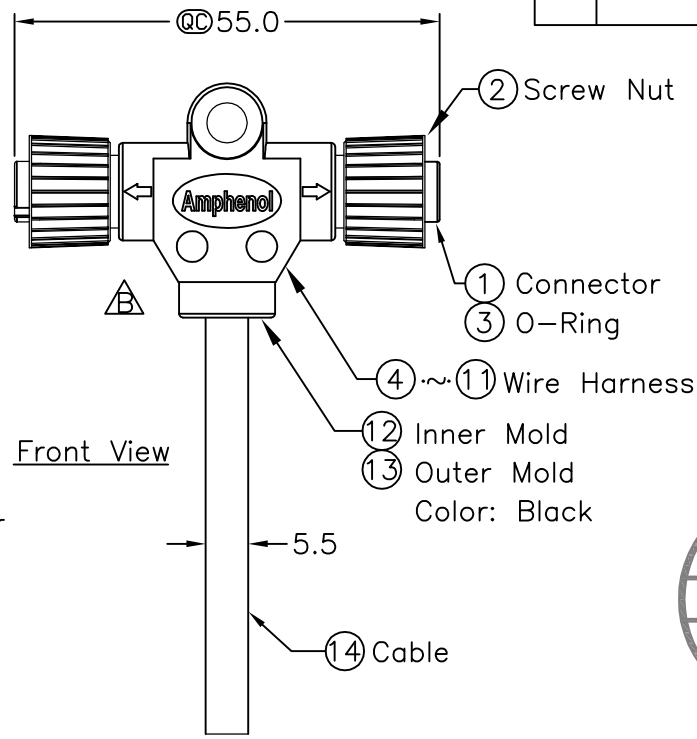


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720321~324	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



SS-080800-FF0-TSAXX  
 ↑  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters



- Note:
- \* QC Important Dimension.
  - \* Waterproof Rate: IP68
  - \* Housing: Black, PU
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Wire Harness: UL1007 24AWG, 8Pcs.
  - \* Cable: UL2464 22AWG\*8C+Talc
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

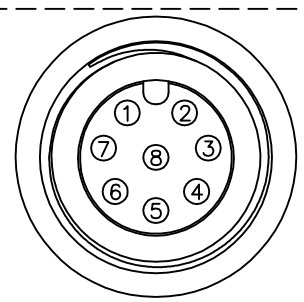

8	Gray	灰	8
7	Purple	紫	7
6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橘	3
2	Red	紅	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm TOLERANCE ±0.5 mm	TITLE M12 Conn T Cable Screw FF Conn FF Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2017/02/14
	SCALE Free	SHEET 1 OF 1		DWG NO SS-080800-FF0-TSAXX	CHECKED BY Rita	DATE 2017/02/14
REV. B	SIZE A4	QC :Inspection Item		CUSTOMER ALTW	APPROVED BY Max	DATE 2017/02/14