REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710137	2006/12/11	DongYaLi	Change DOR0046SI70 To DOR00010016 And Move DOR00010016 To ZSE00100617

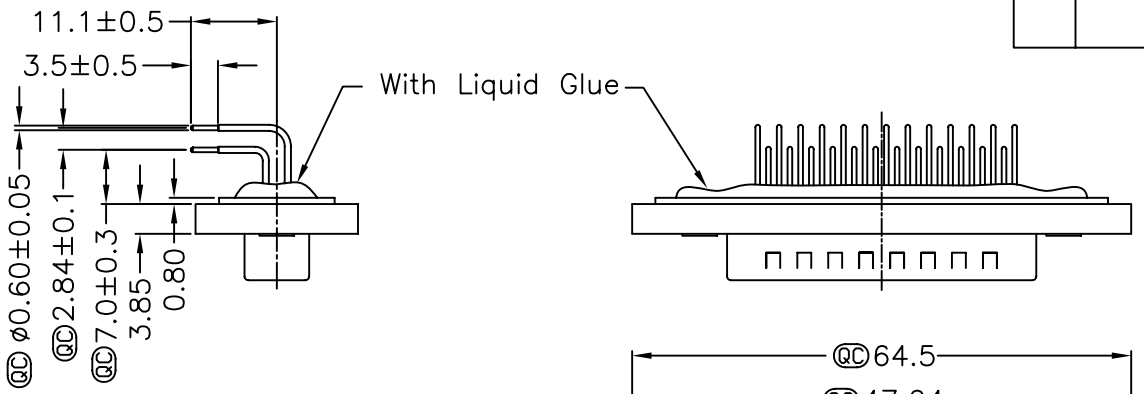

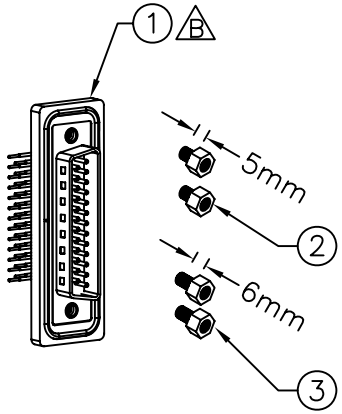

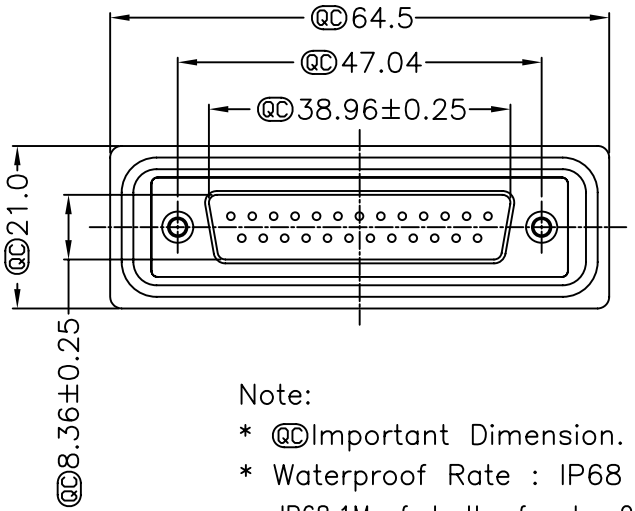

Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為1.2mm以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為1.2~2.0mm

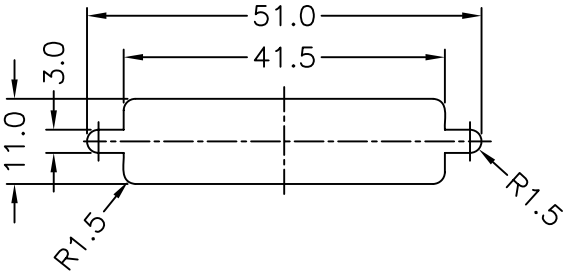

Recommended Panel Cut-Out
建 議 挖 孔 尺 寸

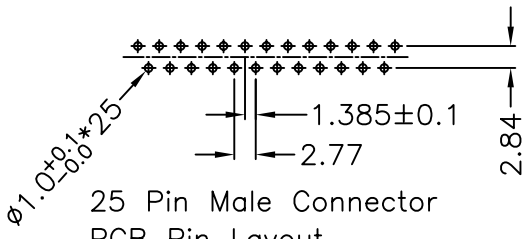

25 Pin Male Connector
PCB Pin Layout

LTW
ENG. DEPT.
CONFIDENTIAL
2007.01.23
ISSUED

Note:
* QC Important Dimension.
* Waterproof Rate : IP68
  IP68:1M of depth of water 24 hours
  （防水等級: IP68 ）
  〈 IP68:1米水深 24小時 〉
* Do Mating Test After Glued
  點膠後,須作對插測試
* D-SUB Conn. : Black Core,PBT
* Plastic Jacket : Black,Nylon+GF
* Pin : Copper Alloy , Gold Plated
* Ring : Light Blue,Silicone
* Screw : Copper Alloy,Nickel Plated,#4-40 UNC

UNIT:mm

TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE: D-SUB Conn.
Panel Screw DB25P M Conn. M Pin
SCALE: Free | SHEET: 1 OF 1
REV.: B | SIZE: A4 | QC :Inspection Item

LTW
亮泰企業股份有限公司

ITEM NO: LTWSDB-25PMMP-SR8001	DRAWN BY: DongYaLi	DATE: 2006/12/11
DWG NO: LTWSDB-25PMMP-SR8001	CHECKED BY: SIMON	DATE: 2006/12/22
CUSTOMER	APPROVED BY: MAX	DATE: 2006/12/22

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY LTW.