



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1630585-86	2016/03/10	Jinhai	Change DWG NO

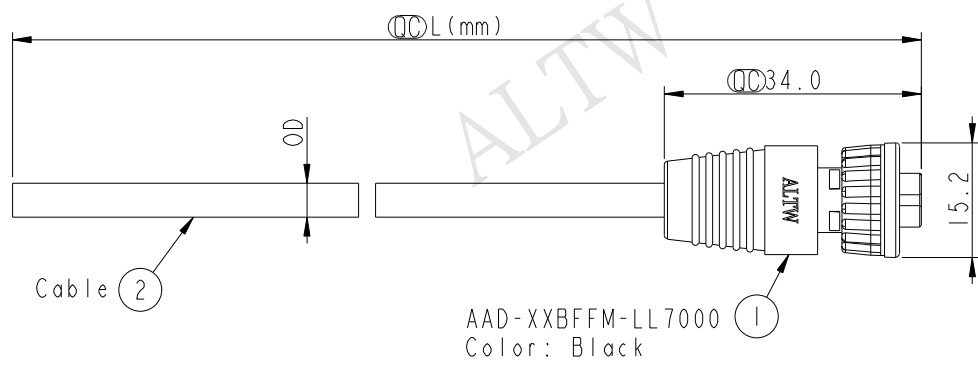


Conn.

AAD-XXBFFM-LL7000
Color: Black

AAD-XXBFFM-LL7AXX


02: 2Pin	XX : 01~99Meters
03: 3Pin	01 : 01Meter
	02 : 02Meters
	99 : 99Meters




3	Black	2	Red
2	Blue	1	Black
1	Brown		

Pin # Wire Pin # Wire

Pin Out



3 Pin



2 Pin

Pin Assignments Front View

3P	PVC	4.5	24	AAD-03BFFM-LL7AXX
2P		4.2		AAD-02BFFM-LL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

Note:

- * \varnothing Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 24AWG+D+AL/Wy PVC Jacket UV Resistant, Black.
- * Cable Length Tolerance: 01M: 40mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

UNIT: mm		
TOLERANCE	± 0.50 mm	

TITLE MINI CABLE LOCK F CONN F PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Jinhai	DATE 2016-03-10
DWG NO. AAD-XXBFFM-LL7AXX	CHECKED BY Rensong	DATE 2016-03-10
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-03-10

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.