
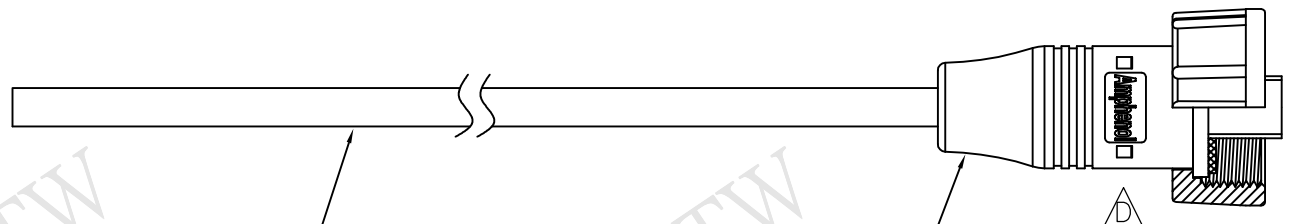
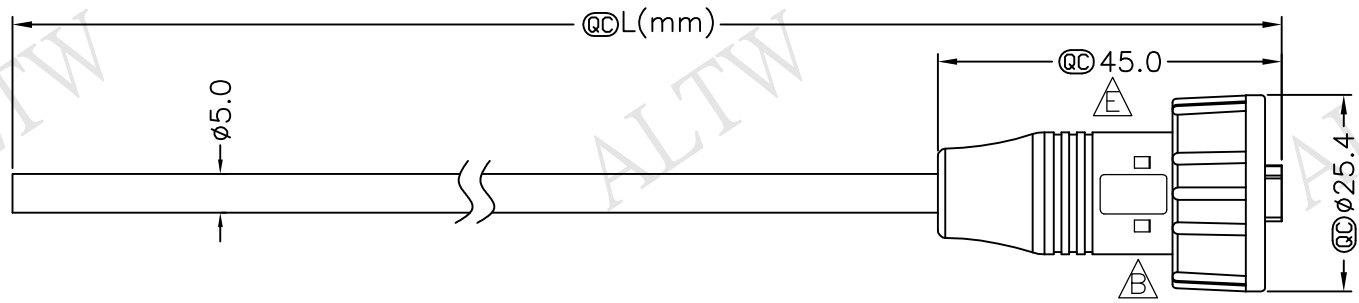



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1220017~20	2012/02/03	Ruru	Change Note
D	LEN1590341~45	2015/09/07	Ruru	Change Logo
E	LEN1610107~11	2016/01/07	Ruru	Change 44.5 To 45.0

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



Cable ②

UB-20BFMM-SL7000 ①  
Color: Black


UB-20BFMM-SL7AXX

- XX :01~05Meters
- 01 :01Meter
- 02 :02Meters
- :
- :
- 05 :05Meters

Cable Length(L):01~05Meters

Notes:

- \* @C Important Dimensions
- \* Waterproof Rate: IP67
- \* Connector: USB-B Male Type, Black
- \* Screw Nut: Nylon+GF, Black
- \* Gasket: EPDM, Black
- \* Cable: USB2.0 28AWG\*1P+24AWG\*2C+Al/My+D+B UV Resistant, OD=5.0mm, Black
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm



Pin Assignments  
Front View

Shield	Drain	地線
4	Black (24AWG)	黑
3	Green (28AWG)	綠
2	White (28AWG)	白
1	Red (24AWG)	紅
Conn.	Wire Color	
Pin Out		

Twist

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Waterproof USB With Cable	
SCALE Free	SHEET 1 OF 1
REV. E	SIZE A4
QC :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	UB-20BFMM-SL7AXX
CUSTOMER	ALTW

DRAWN BY Ruru	DATE 2016/01/07
CHECKED BY Rita	DATE 2016/01/07
APPROVED BY Lisa	DATE 2016/01/07