



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/08/12	Tom	Change Rev. I To Rev. A

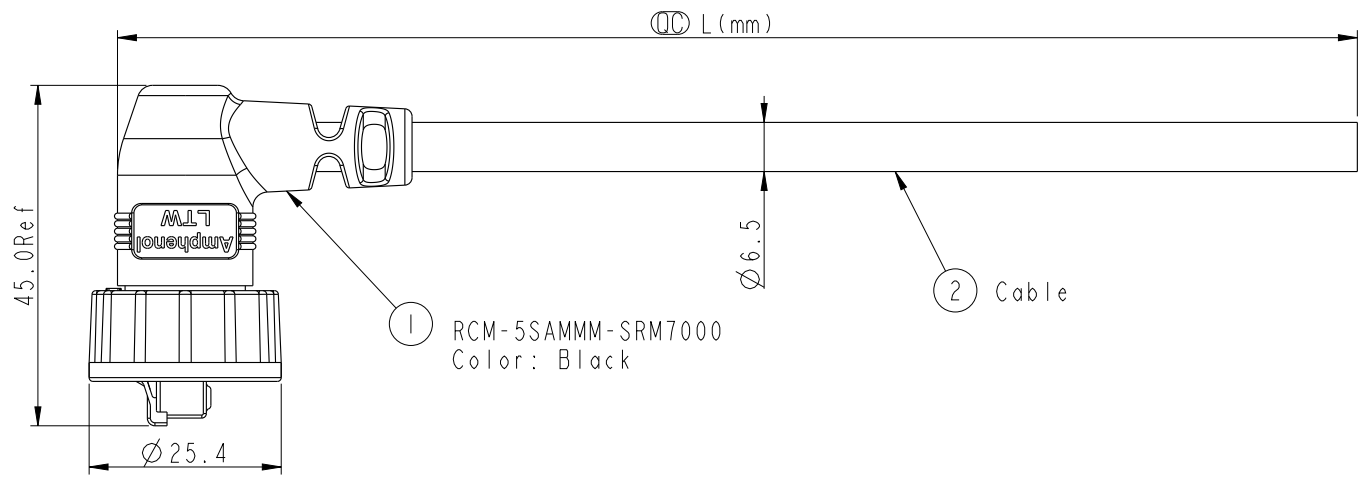

① RCM-5SAMMM-SRM7000
Color: Black

② Cable

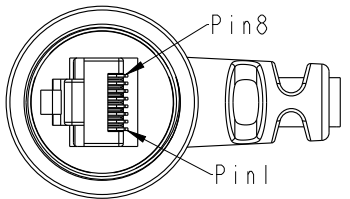

Plug




- Note:
- * Ⓞ Important Dimension
 - * Waterproof Rate: IP67.
 - * Plug: PC, Gold Plated, Shielded
 - * Screw Nut: ZN-ZDC-3
 - * Gasket: Silicone, Gray
 - * Cable: CAT5E FTP, OD Max.: $\varnothing 6.5$, Black.
 - * Cable Length Tolerance:
 - 01M: ± 40 mm
 - 02~05M: ± 60 mm
 - 06~10M: ± 100 mm
 - 11~30M: ± 200 mm
 - 30~99M: ± 500 mm

RCM-5SAMMM-SRM7BXX

- XX: 01~99Meter
 - 01: 01Meter
 - 02: 02Meters
 - ...
 - 99: 99Meters
- Cable Length(L): 01~99Meters

(B)CAT5E FTP



Pin Out		
Wire Color		Plug
Drain Wire	接地	Shield
Brown	棕	8
Brown/white	棕白	7
Green	綠	6
Blue/white	藍白	5
Blue	藍	4
Green/white	綠白	3
Orange	橙	2
Orange/white	橙白	1

Twist 對絞
Twist 對絞
Twist 對絞

UNIT:mm		
TOLERANCE		
± 0.5		

TITLE RJ45,C SIZE,RIGHT ANGLE CABLE SCREW 5E M CONN M PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.2	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Tom	DATE 2014-08-12
DWG NO RCM-5SAMMM-SRM7BXX	CHECKED BY Jerry	DATE 2014-08-12
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2014-08-12