
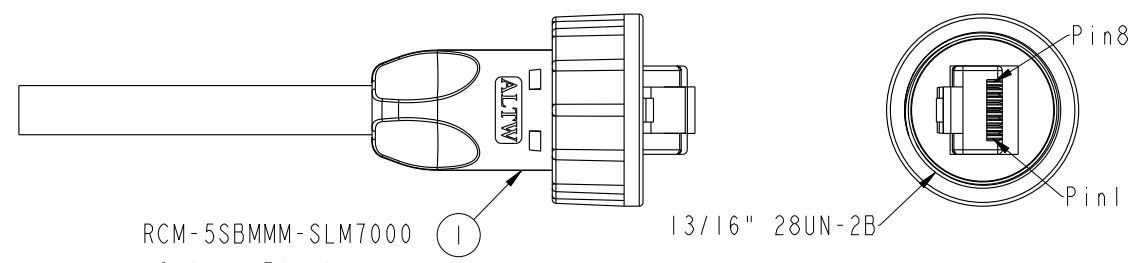



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191337	2019/07/13	JC Chen	Dimensional tolerance change

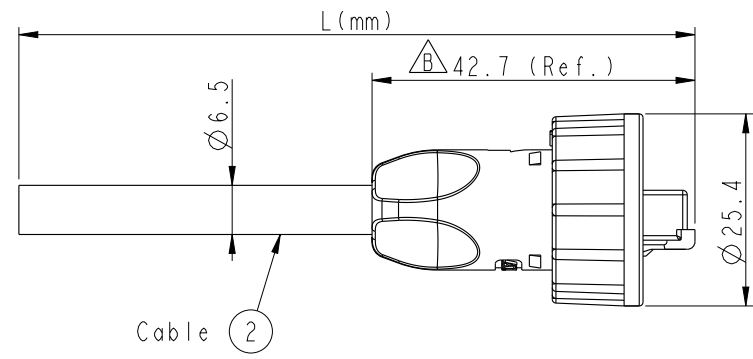

Drain Wire	接地線	Shield	
Brown	棕	8	Twist
White/Brown	白/棕	7	
Green	綠	6	Twist
White/Blue	白/藍	5	
Blue	藍	4	Twist
White/Green	白/綠	3	
Orange	橘	2	Twist
White/Orange	白/橘	1	
Wire Color		Plug	
Pin Out			

RCM-5SBMMM-SLM7000  
Color: Black

RCM-5SBMMM-SLM7BXX  
T  
XX: 01~99Meters  
01: 01Meters  
02: 02Meters  
|  
99: 99Meters  
Cable Length(L):01~99Meters

Note:

- \*  $\text{CC}$  Important Dimension
- \* Waterproof Rate: IP67
- \* Plug: 8P8C, Gold Plated, Shielded
- \* Screw Nut: Zinc Alloy, Nickel Plated
- \* Cable: CAT5E FTP 24#\*4P+D +Al/My(UV Resistant) OD=6.5mm, Black.
- \* Cable Length Tolerance: 1M~10M:±5%mm  
11~99M:±500mm

UNIT:mm		
TOLERANCE	.X ±0.25	
.XX ±0.1		
.XXX ±0.05		
ANGLES	±1°	

TITLE RJ45, Metal, C Size			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	$\text{CC}$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-07-13
DWG NO RCM-5SBMMM-SLM7BXX	CHECKED BY Li Feng	DATE 2019-07-13
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-07-13