


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1440191	2014/05/10	Tom	Updated The Note

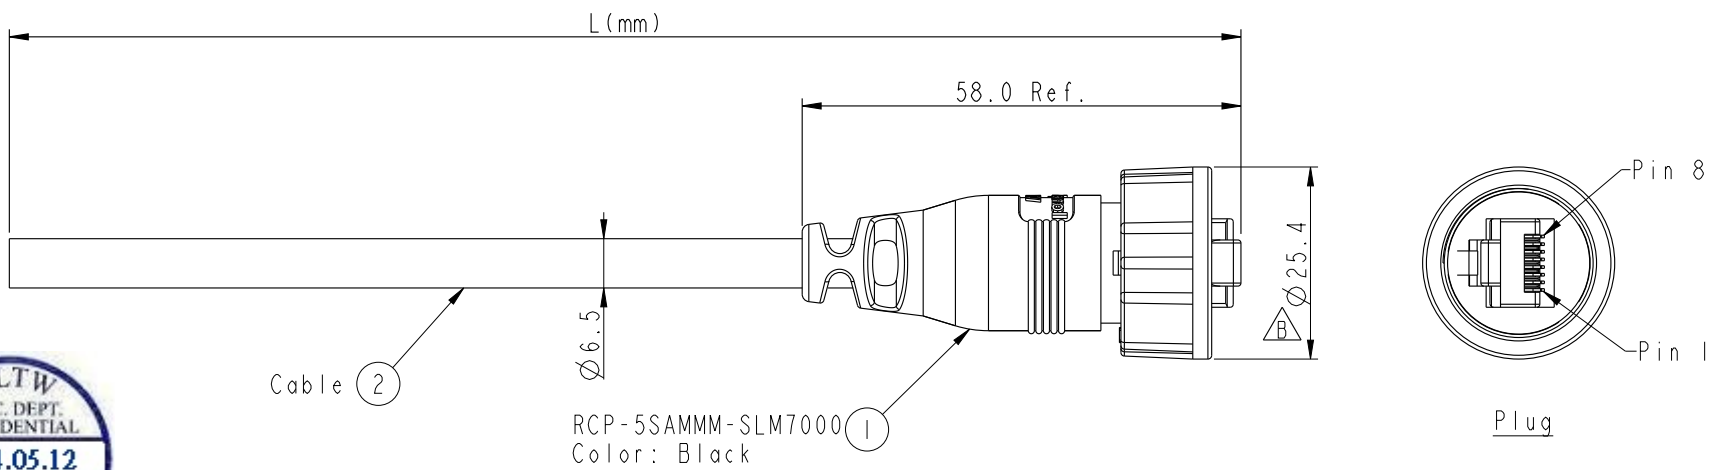

Cable ②

RCP-5SAMMM-SLM7000 ①
Color: Black

Plug

RCP-5SAMMM-SLM7BXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L):01~99Meters
 X:
 (B)CAT5E FTP

Note:
 * Ⓞ Important Dimension
 * Waterproof Rate:IP67.
 * Plug:PC,UL94V-2,Gold Plated,Shielded
 * Screw Nut:Nylon+GF,Black.
 * Gasket:EPDM,Black.
 * Cable: 24AWG*4P,Black,UV Resistant
 (B)CAT5E FTP,OD Max.:Ø6.5.
 * Cable Length Tolerance: 01M:±40mm
 02~05M:±60mm
 06~10M:±100mm
 11~30M:±200mm
 30~99M:±500mm

Pin Out		
Wire Color		Plug
Drain Wire	接地	Shield
Brown	棕	8
Brown/white	棕白	7
Green	綠	6
Blue/white	藍白	5
Blue	藍	4
Green/white	綠白	3
Orange	橙	2
Orange/white	橙白	1

Twist 對絞
 Twist 對絞
 Twist 對絞

UNIT:mm			TITLE RJ45,C SIZE CABLE SCREW 5E M CONN M PIN
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. B.3	Ⓞ: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Tom	DATE 2014-05-10
DWG NO RCP-5SAMMM-SLM7BXX	CHECKED BY Jerry	DATE 2014-05-10
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2014-05-10