REV.	ECN NO.	DATE	SIGN	DESCRIPTION

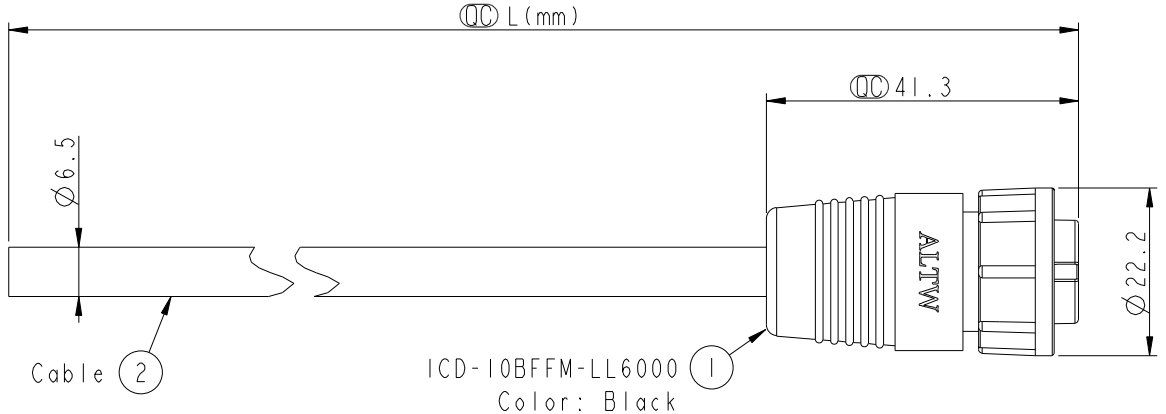



Conn.

ALTW
DCC. DEPT.
CONFIDENTIAL
2014.01.13
ISSUED

ALTW
CONFIDENTIAL
2014-01-11
R&D DEPT.



Pin Assignments
Front View

10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gary	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

ICD-10BFFM-LL6AXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
:
99 :99Meters

Cable Length(L):01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP66
* Housing: Nylon+GF, Black.
* Female Pin: Copper Alloy, Gold Plated.
* Lock Nut: Nylon+GF, Black.
* O-Ring: Silicon, Gray
* Cable: UL2464 24AWG*10C+Drain+Al/My PVC Jacket UV Resistant, OD=6.5, Black.
* Cable Length Tolerance: 01M:40mm
  02M~05M:±60mm
  06M~10M:±100mm
  11M~30M:±200mm
  31M~99M:±500mm

UNIT:mm

TOLERANCE ±0.5

TITLE: MIDDLE CNC PIN CABLE LOCK 10P F CONN F PIN

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. A | WC-REV. A.2 | QC:Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Jiazhen_li	DATE: 2014-01-11
DWG NO: ICD-10BFFM-LL6AXX	CHECKED BY: Ruru	DATE: 2014-01-11
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2014-01-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.