




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


| | | | | |
|------|------------|------------|-------|------------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN1440204 | 2014/04/14 | Vicky | Modify Dimension |

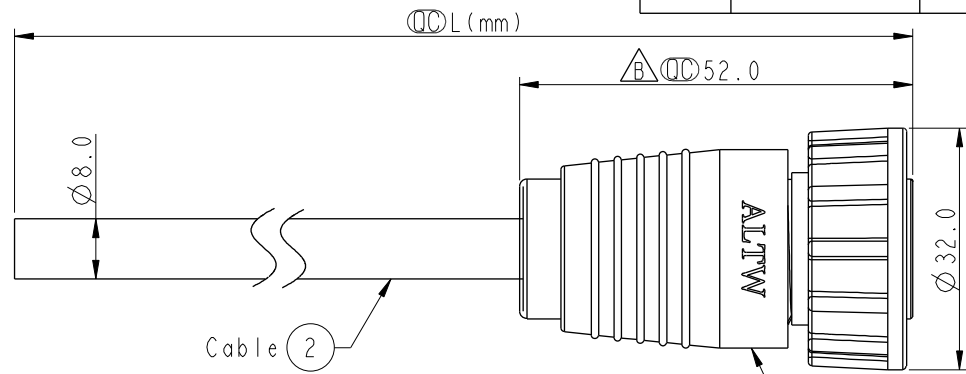

Conn.



| | | |
|-------|--------------|---------|
| 18 | Blue/White | 藍/白 |
| 17 | Green/White | 綠/白 |
| 16 | Orange/White | 橘/白 |
| 15 | Red/White | 紅/白 |
| 14 | Brown/White | 棕/白 |
| 13 | Black/White | 黑/白 |
| 12 | Light Green | 淺綠 |
| 11 | Purple | 紫 |
| 10 | Orange | 橘 |
| 9 | Black | 黑 |
| 8 | Red | 紅 |
| 7 | Pink | 粉紅 |
| 6 | Gray | 灰 |
| 5 | Yellow | 黃 |
| 4 | Green | 綠 |
| 3 | White | 白 |
| 2 | Blue | 藍 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | Pin Out |

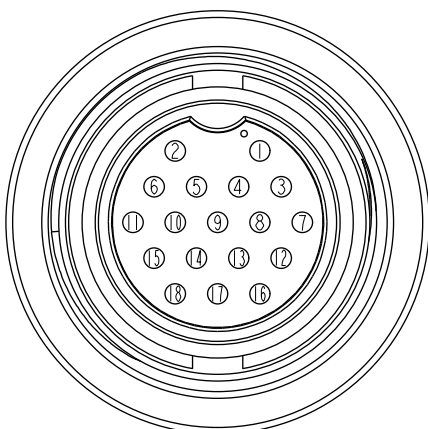

Pin Assignments Front View

IDD-18BFMM-SL6AXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- * Ⓞ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Silicone, Gray.
 - * Cable: UL2464 24AWG*18C+D+AL/My, PVC Jacket, UV Resistant, OD=8.0mm, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

| | | | | | | | |
|---------------------------------|--|----------------|------------------------------|-------------------------------|-----------------------------|-----------------------|--------------------|
| UNIT:mm TOLERANCE ±0.5 mm | TITLE Large CNC Pin Cable Screw 18Pin F Conn M Pin | | | Amphenol LTW 安費諾亮泰企業股份有限公司 | ITEM NO | DRAWN BY Vicky | DATE 2014-04-14 |
| | SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | | DWG NO IDD-18BFMM-SL6AXX | CHECKED BY Ruru | DATE 2014-04-14 |
| | REV. B | WC-REV. A.1 | Ⓞ : Inspection item | | CUSTOMER ALTW | APPROVED BY Victor | DATE 2014-04-14 |